



OUTDOOR POWER EQUIPMENT



for the people and the planet








ZERO
EMISSION



INDEX



18+18V Li-Ion Garden Tools	14-17	Brush Cutters/String Trimmers	37-39	Power Cutters	53-55
DLM431	17	EM2500U	39	EK6100	54
DUB361	17	EM2650UH	38	EK7301WS	54
DUB362	17	EM4350RH	39	EK7650H	55
DUC252	16	RBC2500	38	EK7651H	55
DUC400	16	RBC411	39	EK8100WS	54
DUH551	16	RST250	38	Generators	56-58
DUR364L	16	UR3000	38	EG2250A	57
DUX60	17	Lawn Mowers	40-43	EG2850A	57
18V Li-Ion Garden Tools	18-21	ELM3311	41	EG4550A	57
BUH523RF	20	ELM3711	41	EG5550A	57
DCU180	21	ELM4110	41	EG6050A	58
DUB182	21	ELM4612	41	Accessories	59-66
DUH483RF	20	ELM4613	42	Notes	67
DUM604	21	PLM4120N	42		
DUR184L	20	PLM4620N2	42		
DUR189	20	PLM4621N	42		
DVF104	21	PLM4621N2	43		
12VMAX Li-Ion Garden Tools	22-24	PLM4622N	43		
UM600D	24	PLM5113N2	43		
UR100D	24	PLM5117P	43		
Chain Saws	28-33	Blowers	44-46		
DCS230T	30	BHX2500	46		
DCS5200	30	EB7660TH	46		
DCS7301	31	EB5300TH	46		
DCS7901	31	PM7650H	46		
DCS9010	32	UB0801V	45		
EA3502S40B	30	UB1102	45		
EA4301F45B	30	UB1103	45		
EA6100P	31	Others	47-48		
EY2650H25H	32	EE2650H	48		
UC4041A	33	EF1550RH	48		
UC4551A	33	EVH2000	48		
Hedge Trimmers	34-36	EX2650LH	48		
EH6000W	36	High Pressure Washer & Submersible Pump	49-52		
EH7500S	36	HW112	51		
EH7500W	36	HW1200	52		
EN4950H	36	HW1300	52		
UH4570	35	HW131	51		
UH5261	35	HW132	51		
UH6570	35	HW151	51		
UH7580	35	PF0410	52		

LITHIUM-ION BATTERY / REFERENCE CHART

VOLTAGE				CHARGER				
				SINGLE PORT CHARGER DC18RC (FAST CHARGER) LXT	TWO PORT CHARGER DC18RD (FAST CHARGER) LXT	TWO PORT CHARGER DC18RE (FAST CHARGER) CXT & LXT	RAPID AUTOMOTIVE CHARGER DC18SE (compatible with 12V/ 24V DC cigarette lighter socket	FOUR PORT CHARGER DC18SF (STANDARD CHARGER) LXT
110 - 120 (2pin type) Part No.				195582-6	-	198443-9	(compatible with 12V/ 24V DC cigarette lighter socket	-
110 - 120 (3pin type) Part No.				-	196929-7*	-		-
220 - 240 (2pin type) Part No.				195584-2	196933-6	198575-2		-
220 - 240 (3pin type) Part No.				197378-1	196940-9	198447-1	194621-9	196427-1
<div>18V LXT Li-ion</div>				<div>14.4V LXT Li-ion</div> <div></div>				
6.0Ah				55 min	55 min	55 min	130 min	130 min 260 min
BATTERY ID	BL1860B			FAST CHARGING	FAST CHARGING	FAST CHARGING		1-2 batteries 3-4 batteries
Part No.	197422-4							
PACKAGE	SINGLE							
FUEL GAUGE	✓							
5.0Ah				45 min	45 min	45 min	110 min	110 min 220 min
BATTERY ID	BL1850B			FAST CHARGING	FAST CHARGING	FAST CHARGING		1-2 batteries 3-4 batteries
Part No.	197280-8							
PACKAGE	SINGLE							
FUEL GAUGE	✓							
3.0Ah				22 min	22 min	22 min	60 min	60 min 120 min
BATTERY ID	BL1830B	BL1830B	BL1430A	FAST CHARGING	FAST CHARGING	FAST CHARGING		1-2 batteries 3-4 batteries
Part No.	632G12-3	197599-5	197615-3					
PACKAGE	BULK	SINGLE	SINGLE					
FUEL GAUGE	✓	✓	✓					
1.5Ah				15 min	15 min	15 min	30 min	30 min 60 min
BATTERY ID	BL1815N		BL1415NA	FAST CHARGING	FAST CHARGING	FAST CHARGING		1-2 batteries 3-4 batteries
Part No.	632A54-1		196280-5					
PACKAGE	BULK		SINGLE					
FUEL GAUGE	X		✓					
1.3Ah				15 min	15 min	-	-	- -
BATTERY ID	BL1815			FAST CHARGING	FAST CHARGING			
Part No.	195445-6							
PACKAGE	SINGLE							
FUEL GAUGE	X							

(* - In future it will be available in 2PIN only)

(• - To be discontinued)

VOLTAGE	
	110 - 120 (2pin type) Part No.
	220 - 240 (3pin type) Part No.
36V LXT Lithium-ion	
2.6Ah BL3626 Part No. 194873-2	
12.0Ah BL36120A Part No. BL36120A	


CHARGER	
DC36RA	DC3600
194869-3	197727-2
194864-3	-
	
22 min	-
-	180 min


VOLTAGE

	110 - 120 (2pin type) Part No.	110-120
	220 - 240 (2pin type) Part No.	220-240
	220 - 240 (3pin type) Part No.	

10.8V / 12V MAX

Slide Battery

	2.0Ah	
BATTERY ID	BL1021B	
Part No.	197396-9	
PACKAGE	CARTON	
FUEL GAUGE	✓	

	4.0Ah	
BATTERY ID	BL1041B	
Part No.	197406-2	
PACKAGE	CARTON	
FUEL GAUGE	✓	

CHARGER		
Two Port Charger (LXT + CXT)	Fast Charger	Standard Charger
DC18RE	DC10SB	DC10WC
198443-9	197435-5	630967-4 •
198575-2	198576-0	
198447-1	198433-2	
		
30 min	30 min	70 min
60 min	60 min	130 min

BL MOTOR

Lighter


Long Life

Smaller

More Work

Stronger

Smarter

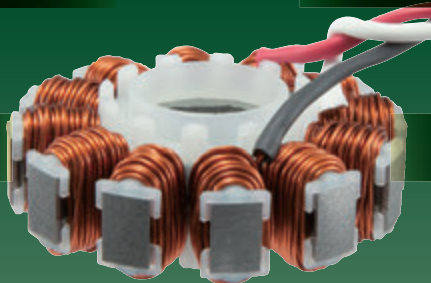

High Performance with Brushless DC Motor

Brushless DC motor

- Maintenance-free due to no brush.
- Energy production is more efficient than brushed DC motor because of no friction loss caused by brushes, enabling to lower amperage for reduced heat production and increased work amount on a single full battery charge.

More work amount on a single full battery charge

- Thanks to the very efficient energy production of BLDC motor, work amount on a single full battery charge is increased.
- Life time work amount of a battery is increased, reducing the battery cost.

Brushless DC motor

- Use of BLDC motor lowers heat production; the temperature rise at housing surface can be recessed well even in hard industrial applications requiring continuous long operation.



Go Green with Makita Lithium-ion Cordless Garden Tools

Best choices for resorts, hotels, public places and among residential areas due to



As a global supplier of a comprehensive range of power tools and garden tools that assist people in creating homes and living environments, it is vital that we consider the environmental impact on each person's lifestyle and recognize that environmental issues such as global warming concern us directly. Makita offers a range of cordless garden tools which are engineered to use with long-life lithium-ion batteries to save energy, eliminate CO2 emissions, preserve the environment and light in weight for user's comfort.

Our 18v+18v lithium-ion cordless garden tools are friendly to both users and the environment



The "Go Green" slogan symbolizes Makita's commitment to continually providing new value as a comprehensive international supplier of tools. We hope to always remain a company that maintains a steady eye on society, challenging ourselves to create a "sustainable recycling-oriented society" that combines the environment with the economy

18v + 18v → 36v



Blower
DUB361 / DUB362



Grass Trimmer
DUR365U / DUR364L
DUR366L



Multi Function
Power Head
DUX60



Chain Saw
DUC252 / DUC252C
DUC302 / DUC303
DUC353 / DUC400



Hedge Trimmer
DUH551 / DUH651



Pruning Shear
DUP361



Lawn Mower
DLM380 /
DLM431



Hedge Trimmer
DUH483 / DUH523



Recipro Saw
DJR185 / DJR183



Grass Shear
DUM604





Grass Trimmer
DUR187U / DUR187L
DUR188U / DUR188L
DUR189L



String Trimmer
DUR181



Blower
DUB183



Chain Saw
DUC122 / DUC204 /
DUC254 / DUC254C



Recipro Saw
JR103D / JR105D



Hedge Trimmer
UH201D



Grass Shear
UM600D



Wheelbarrow
DCU180



Garden Sprayer
DVF104 / VF154



Grass Trimmer
UR100D



Optimum Charging System

Rapid Optimum Charger

It is necessary to cool down before start charging when the battery temperature is high.
Built-in fan circulates air through the battery before start charging and during the charging process to cool the battery for faster charge time.

The Makita Rapid Optimum Charger communicates with the battery's built-in chip throughout the charging process to optimize battery life by actively controlling current, voltage and temperature.

The optimum charging system

Forced air cooling



Fast charging



General charging method


Natural heat dissipation




Waiting time for charging



The optimum charging system



General charging method



Cordless advantage

Easy to Use

Start-up

Engine tools



Engine tools need time and tips to start-up.

Cordless tools



Cordless tools start just after inserting battery and switching on.

Constant speed control

Engine tools



Engine tools are hard to keep the constant rotation speed under load.

Cordless tools



Cordless tools keep rotation speed under load with "Constant speed control" function.

Low noise Noise level comparison

Engine tools




=

Cordless tools



Battery Protection Function

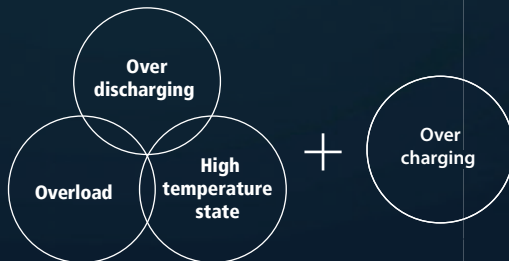

This function is communication technology that allows the tool and battery to monitor conditions and exchange data in real time to protect against Overload, Over-Discharge and Overheating.



Anytime Charge

No Memory Effect
No discharging required




Shock Absorbing

Heavy Duty Pack



Purpose-built brushless motors

Makita-built Brushless Motor the motor to run cooler and more efficiently for longer life. The electronically controlled Brushless Motor efficiently uses energy to match torque and RPM to the changing demands of the application.

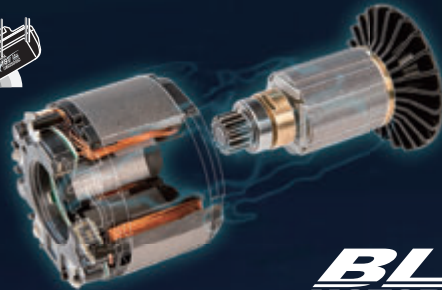

BL
MOTOR


Clean & Easy Maintenance

Zero emission

Engine tools



Cordless tools



Cordless tools don't generate any exhaust gas

Cost and time reduction


Engine tools



It takes time to prepare mixed fuel for Engine.

Long term storage

Engine tools
If you store the tool for a long period, when the fuel remained in the tank




It may be a cause of trouble or defect.
Remaining fuel must be extracted completely before storage.

Cordless tools



Just insert battery and ready to use.

Cordless tools
Even if you store the tools for a long period,




Just insert battery and ready to use.

Easy maintenance

Engine tools

Engine tools take time for maintenance.



Engine oil Air cleaner Spark plug
Fuel plug Grease up

Cordless tools

Cordless tools are maintenance - free unlike Engine tools.




POWER SOURCE KIT

A combination of Makita 18V Li-ion Batteries and Charger in a Makpac connector case with moulded inlay. Makita owns the world's largest cordless tool line-up in 18V Li-ion tools and offer them in different variants i.e. 6.0Ah, 5.0Ah, 3.0Ah. Tools are also offered without battery & charger.

Now pick up the Makita Power source kit, then purchase the 18V "bare tools" and you get the job done. It's an ideal way to start building a Makita cordless tool line-up.

Users who preowned "Tool only version" (i.e. Tool without battery and charger) can benefit with this power source kits.

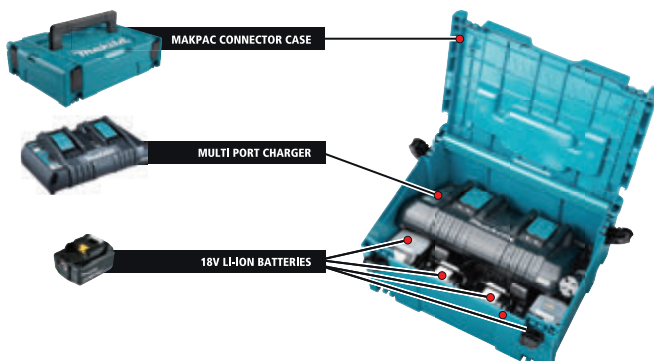


Kit 1 (With 6.0Ah Battery x 2pcs)											
POWER SOURCE KIT PART No.	SET CONTENTS										
	BATTERY					CHARGER					MAKPAC CASE
	MODEL	VOLTS	AMPERE	FUEL GAUGE	QTY	MODEL	VOLTS	PORT	PIN	QTY	
198082-5	BL1860B	18V Li-ion	6.0Ah	✓	2pcs	DC18RD	18V-14.4V Li-ion	2	3	1pc	Type 3
Kit 2 (With 6.0Ah Battery x 1pc)											
POWER SOURCE KIT PART No.	SET CONTENTS										
	BATTERY					CHARGER					MAKPAC CASE
	MODEL	VOLTS	AMPERE	FUEL GAUGE	QTY	MODEL	VOLTS	PORT	PIN	QTY	
198108-3	BL1860B	18V Li-ion	6.0Ah	✓	1pc	DC18RC	18V-14.4V Li-ion	1	3	1pc	Type 1
Kit 3 (With 5.0Ah Battery x 4pcs)											
POWER SOURCE KIT PART No.	SET CONTENTS										
	BATTERY					CHARGER					MAKPAC CASE
	MODEL	VOLTS	AMPERE	FUEL GAUGE	QTY	MODEL	VOLTS	PORT	PIN	QTY	
198568-9	BL1850B	18V Li-ion	5.0Ah	✓	4pcs	DC18RD	18V-14.4V Li-ion	2	3	1pc	Type 3
197626-8	BL1850B	18V Li-ion	5.0Ah	✓	4pcs	DC18RD	18V-14.4V Li-ion	2	2	1pc	Type 3
Kit 4 (With 5.0Ah Battery x 2pcs)											
POWER SOURCE KIT PART No.	SET CONTENTS										
	BATTERY					CHARGER					MAKPAC CASE
	MODEL	VOLTS	AMPERE	FUEL GAUGE	QTY	MODEL	VOLTS	PORT	PIN	QTY	
198567-1	BL1850B	18V Li-ion	5.0Ah	✓	2pcs	DC18RD	18V-14.4V Li-ion	2	3	1pc	Type 3
197629-2	BL1850B	18V Li-ion	5.0Ah	✓	2pcs	DC18RD	18V-14.4V Li-ion	2	2	1pc	Type 3
Kit 5 (With 3.0Ah Battery x 4pcs)											
POWER SOURCE KIT PART No.	SET CONTENTS										
	BATTERY					CHARGER					MAKPAC CASE
	MODEL	VOLTS	AMPERE	FUEL GAUGE	QTY	MODEL	VOLTS	PORT	PIN	QTY	
197972-9	BL1830B	18V Li-ion	3.0Ah	✓	4pcs	DC18RD	18V-14.4V Li-ion	2	3	1pc	Type 3



ADT

Automatic torque Drive Technology


Automatically changes the cutting speed according to load condition for an optimum operation



AFT

Active Feedback sensing Technology

Shuts down the tool to protect the user, if the rotation speed suddenly slows down (e.g., kick-back)

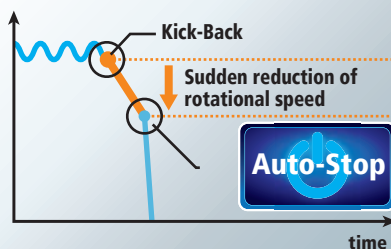

18+18V Li-Ion Garden Tools



Variable Speed



Constant Speed



Electronic 2-Speed



Electronic 3-Speed



Soft Start



Reversing



Automatic Oiling



Chain Brake



Brake

Multi-Function System

consisting of power head & versatile optional attachments

18+18V

Cordless Multi Function Power Head DUX60



1

Reverse switch for easy removal of grass clippings from the cutting tool

Grass clippings can be removed by slow reverse rotation of the cutting tool (automatically stops in 3 seconds) by pressing Touch button switch and pulling Trigger switch



2

Active Feedback sensing Technology

Shuts down the tool to protect the user, if the rotation speed suddenly slows down



AFT

3

High operating efficiency

Single-lever cutting height adjustment with a wide range of 13 positions adjust from 20 to 75 mm



AFT
BL
MOTOR
XPT
EXTREME PROTECTION TECHNOLOGY

LITHIUM-ION

18v + 18v → 36v

18+18V
LXT

18V
LXT

10.8V/
12VMAX
CXT

Chain Saws

Hedge
Trimmers

Brush
Cutters/
String
Trimmers

Lawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12V/MAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

DUC400 400mm (16")

442

Cordless Chain Saw**5.0Ah, Z****Increased cutting speed with more powerful motor**

- Front-hand-guard-activated kickback brake
- New adjustment lever for easier tool-less saw chain tension adjustment
- Chain oil level window allows to check oil level from outside



18V → 18V → 36V

Chain speed per minute	0-1,200m
Guide bar length	400mm (16")
Chain blade	Pitch: 9.5mm (3/8") Gauge: 1.1/1.3mm(0.043"/0.05")
Vibration level	Cutting Wood: 5.3m/s²
Sound pressure level	87.7dB(A)
Sound power level	100.4dB(A)
Dimensions (L x W x H)	818x215x235mm
Net weight	5.4kg

Standard Equipment: Saw Chain, Guide Bar, Guide Bar Cover, Chain oil 100mL

DUC252 250mm (10")

442

Cordless Chain Saw**5.0Ah, 3.0Ah, Z****Increased cutting speed with more powerful motor**

- Front-hand-guard-activated kickback brake
- New adjustment lever for easier tool-less saw chain tension adjustment
- Chain oil level window allows to check oil level from outside



18V → 18V → 36V

Chain speed per minute	500m
Guide bar length	250mm (10")
Chain blade	Pitch: 9.5mm (3/8") Gauge: 1.3mm(0.05")
Vibration level	Cutting Wood: 4.7m/s²
Sound pressure level	84.4dB(A)
Sound power level	95.4dB(A)
Dimensions (L x W x H)	545x234x198mm
Net weight	4.1kg

Standard Equipment: Guide Bar Cover, Oil Supply, File.

DUH551 550mm (21-5/8")

442

Cordless Hedge Trimmer**Z****High maneuverability and environment friendly**

- Rotatable rear handle
- Good balance of weight
- Low noise



18V → 18V → 36V

Blade length	550mm
Strokes per minute (spm)	2,000-3,600
Tooth spacing	36mm (1-7/16")
Sound pressure level	81.5dB(A)
Sound power level	91dB(A)
Vibration level	2.5m/s² or less
Dimensions (L x W x H)	1,065x225x200mm
Net weight	5.1kg

Standard Equipment: Blade Cover.

DUR364L**Cordless Grass Trimmer****Z****2-Speed Grass Trimmer with Loop Handle**

- Makita-built Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Constant Speed Control minimizes reduction in rotation speed under load
- Direct-drive motor mounted directly on the trimmer head for increased efficiency and improved tool balance



18V → 18V → 36V

No Load Speed (rpm)	High: 6,500, Low: 5,000
Spindle Size	M8 x 1.25RH
Sound Pressure Level	81 dB(A)
Sound Power Level	89 dB(A) (nylon)
Vibration Level Left Handle	1.7m/s²
Vibration Level Left Handle	1.2m/s²
Dimensions (L x W x H)	1,797x310x229 mm
Max Output	550W
Max. Runtime	100min (with BL1850B)
Net weight	4.5kg

Standard Equipment: Nylon cutting head, Universal guard, Shoulder harness with double shoulder strap, Wrenches.

DUX60 550mm (21-5/8")**Cordless Multi Function Power Head****NEW**
AFT
BL
MOTOR
XPT
EXTREME PROTECTION TECHNOLOGY
LITHIUM-ION

Multi-function system consisting of power head and versatile optional attachments / accessories *

- Ideal for wide range of applications
- Reverse switch for easy removal of grass clippings
- **AFT** shuts down the tool to protect the user, if the rotation speed suddenly slows down


18V + 18V → 36V

No load speed (rpm)	High: 0 - 9,700
	Medium: 0 - 8,200
	Low: 0 - 5,700
Dimensions (L x W x H)	1,011x320x216mm
Net weight	8.7kg

Standard Equipment: Harness, Safety Goggles, Hex Wrench,
Accessory Bag. * Refer to page no. 66 for attachments / accessories

DLM431**Cordless Lawn Mower**
XPT
EXTREME PROTECTION TECHNOLOGY
LITHIUM-ION

430mm Cordless Lawn Mower with better usability

- Dual battery fuel gauge located near operator's hand
- Grass box with Grass level indicator
- Less pushing force thanks to Deck cover
- Easier installation and removal of grass box
- Smooth running wheels


18V + 18V → 36V

Cutting width	430mm (17")
Cutting height	20-75mm (13/16" - 2-15/16")
No load speed (rpm)	3,600
Recommended mowing area	500-1,000m ²
Grass box capacity	50L
Dimensions (L x W x H)	1,450x460x950mm
Max output	730W
Net weight	18.0kg

Standard Equipment: Socket Wrench.

DUB362**Cordless Blower**
BL
MOTOR
XPT
EXTREME PROTECTION TECHNOLOGY
LITHIUM-ION

Powered by two battery system in series

- Excellent handling and comfortable operation by excellent balance
- 6-stage air volume/velocity selection just by adjusting dial
- 3-stage telescopic long nozzle with an adjustment range of 100mm (4")
- Reduced noise level


18V + 18V → 36V

Air volume	6.9-13.4m ³ /min
Air speed	27-54m/s
No load speed (rpm)	11,400-21,500
Sound power level	96dB(A)
Vibration level	0.3m/s ²
Dimensions (L x W x H)	830-930x205x295mm
Net weight	3.5kg

Standard Equipment: Nozzle, Shoulder belt.

DUB361**Cordless Blower**
XPT
EXTREME PROTECTION TECHNOLOGY
LITHIUM-ION

Cordless blower powered by two 18V Li-ion batteries in series

- High / Low push button for two different air volume settings
- XPT (Extreme Protection Technology)


18V + 18V → 36V

Air volume	Hi: 4.4m ³ /min; Lo: 2.6m ³ /min
Air speed	Hi: 93m/s; Lo: 57m/s
No load speed (rpm)	Hi: 17,000; Lo: 10,000
Sound pressure level	82.3dB(A)
Sound power level	94.7dB(A)
Dimensions (L x W x H)	905 x 141 x 194mm
Net weight	2.6kg

Standard Equipment: Nozzle, Shoulder Belt.

18+18V
LXT18V
LXT10.8V/
12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18

18V Li-Ion Garden Tools



Variable Speed



Constant Speed



Electronic 2-Speed



Electronic 3-Speed



Soft Start



Reversing



Brake



LED Job Light

Universal design for Grass shear and Hedge trimmer use

18V

Cordless Grass Shear DUM604



Hedge Trimmer Blade
(Comes along with the tool
only for Z version)

1

Tool-less blade change system

- Grass shear blade can be removed and installed without tool
- Hedge trimmer blade can be removed and installed by loosening / tightening screws



2

Cutting depth adjustment: 15/ 20/ 25 mm (10 mm: when grass receiver is removed)



3

Dual blade action Stain-free grass shear blade

Surface of glittering silver features high anti-abrasion for long lasting coating



18V
LITHIUM-ION

18+18V
LXT

18V
LXT

10.8V/
12VMAX
CXT

Chain Saws

Hedge
Trimmers

Brush
Cutters/
String
Trimmers

Lawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12V/MAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

DUH483RF / BUH523RF**Cordless Hedge Trimmer****3.0Ah****User-replaceable blade**

- Anti-vibration structure, 5 cushions to absorb vibration from blade and motor-crank section
- Rubberized soft grip provides comfortable and sure grip
- Stain-free shear blade surface of glittering silver obtained by non-electrolyzed nickel plating that features high anti-abrasion surface for long lasting coating


18V
LITHIUM-ION

	DUH483RF	BUH523RF
Blade length	480mm	520mm
Strokes per minute (spm)	1,350	1,350
Tooth spacing	26mm (1")	26mm (1")
Sound pressure level	75dB(A)	77dB(A)
Sound power level	83.8dB(A)	84.3dB(A)
Vibration level	2.5m/s ²	2.5m/s ²
Dimensions (L x W x H)	888x195x193mm	938x195x193mm
Net weight	3.0kg	3.1kg

Standard Equipment: Blade cover.**"RF"** model comes with 1pc of 18V(3.0Ah) Li-Ion battery and 1 charger.**DUR189****Cordless Grass Trimmer****3.0Ah, Z**
NEW

ADT
BL
MOTOR
Comfortable short telescopic pipe provides easy handling in tight spaces

- Better maneuverability regardless of user's size by telescopic pipe
- ADT (Automatic torque Drive Technology) adjusts speed and torque during operation for optimum performance
- Multifunctional control panel for power on/off / variable speed control / reversing blade rotation


18V
LITHIUM-ION

No Load Speed (rpm)	High/Medium/Low/ADT Mode: 6,000/5,000/4,000/4,000-6,000
Cutting Width	Trimmer Head: 300mm Plastic Blade: 255mm
Spindle Size	M8 x 1.25 RH
Vibration Level	Front / Rear: 2.5 / 2.5m/s ² or less
Dimensions (L x W x H)	1,518-1,618 x 258 x 369 mm
Net weight	3.1 - 3.4kg

Standard Equipment: Single harness, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench.**DUR184L****Cordless Grass Trimmer****Z****TO BE DISCONTINUED**
BL
MOTOR
XPT
Advanced Torque Drive Technology
Multifunctional control panel for power on/off / variable speed control / reverse action

- Telescopic pipe adjustable in length from 1,534mm to 1,634mm
- Trigger switch with lock off lever
- Reverse switch for easy removal of grass clippings from the cutting tool


18V
LITHIUM-ION

No Load Speed	High/Low: 6,000/5,000rpm
Cutting Width	Trimmer Head: 300 mm
Spindle Size	M8 x 1.25 RH
Dimensions (L x W x H)	1,534-1,634x258x417mm
Max Output	250W
Max Run Time	80min
Net weight	3.3 kg

Standard Equipment: Safety goggles, Single harness, Nylon cutting head, Accessory bag, Hex wrench.

DUM604

Cordless Grass Shear

5.0Ah, Z



NEW

18V LITHIUM-ION

Universal design for Grass shear and Hedge trimmer use

- Tool-less blade change system
- Stain-free grass shear blade
- 200 minutes continuous run time (with 18V, 5.0Ah battery)
- Cutting depth adjustment: 15/ 20/ 25 mm

Cutting Width	160 mm
Strokes Per Minute (spm)	2,500
Cutting height adjustment	15, 20, 25mm
Dimensions (L x W x H)	337x177x131mm
Net weight	1.8 kg (with battery)

Standard Equipment: Grass shear blade, Blade Cover, Hedge trimmer blade (only with "Z" version), Base Frame, Grass and Chip receiver.

DVF104 10L

Cordless Garden Sprayer

Z



Environment-friendly sprayer with no emission and extremely low noise

- Two nozzles included as standard equipment for added versatility (wide angle nozzle & Y-shaped double nozzle)
- Comfortable backpack style with padded shoulder straps
- 10 Liter tank capacity

Max. pressure	0.3Mpa (3kgf/cm ²)
Chemical tank	DVF104 : 10L
Dimensions (L x W x H)	DVF104 : 315x225x415mm
Net weight	DVF104 : 3.8kg

Standard Equipment: Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Spray Pipe Holder, Shoulder Harness.

DUB182

Cordless Blower

Z



High / Medium / Low air volume settings

- Ergonomically designed handle with soft rubberized grip
- Anti-static electricity for comfortable operation



18V LITHIUM-ION

Air volume	2.6m ³ /min
Air speed	80m/s
Air pressure	5.4kPa (550mm H2O)
No load speed (rpm)	0-18,000
Sound pressure level	85dB(A)
Sound power level	95dB(A)
Vibration level	2.5m/s ²
Dimensions (L x W x H)	525x155x212mm
Net weight	1.7kg

Standard Equipment: Nozzle assembly.

DCU180

Battery Powered Wheel Barrow

Z

Bucket tray and Flat bed tray sold separately



NEW

Moving cart powered by one or two LXT batteries

- Able to run with even one battery thanks to parallel battery connection
- Detachable Rear wheel
- Brake lever with locking mechanism



Voltage	18V LXT Li-ion
Max Run Time (min)	with BL1860B: 120min
Max Load Capacity	130 kg
Traveling Speed	Forward, High/Low: 0-3.5 / 0-1.5 km/h Reverse: 0 - 1 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,315x1,060x900mm (with Flat Bed Tray) 1,310x820x900mm (with Bucket Tray)
Net weight	44.8kg (with Flat Bed Tray and Battery) 39.6kg (with Bucket Tray and Battery)

Standard Equipment: Lock Key, Support Legs, Wrenches.

18+18V LXT

18V LXT

10.8V/12VMAX CXT

Chain Saws

Hedge Trimmers

Brush Cutters/String Trimmers

Lawn Mowers

Blowers

Others

Power Cutters

Generators

Accessories

12VMAX CXT Li-Ion Garden Tools



Soft Start

**Compact size is ideal for trimming
and precise edging**

12VMAX

Cordless Grass Trimmer UR100D



XPT
EXTREME PROTECTION TECHNOLOGY

CXT

12V^{max}
LITHIUM-ION

- 1**
with Nylon cord
(One String comes out from opening)



- with Plastic blade**
(One-blade cutter)




- 3**
Wire guard
- reduces the risk of damaging fences, flowers or ornaments
 - used as auxiliary guide for edging




- 2**
Ergonomic loop handle for added maneuverability

- Provides easy handling especially on level ground
- Tool-less removal/installation
- Installation position is adjustable to any desired position without tool



- 4**
**Telescopic pipe shaft adjustable in length
from 845mm (33-1/4") to 1,195mm (47")**



18+18V
LXT

18V
LXT

10.8V/
12VMAX
CXT

Chain Saws

Hedge
Trimmers

Brush
Cutters/
String
Trimmers

Lawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

UR100D

Cordless Grass Trimmer

4.0Ah, Z



Compact size ideal for trimming and precise edging

- Well balanced design with fully adjustable features to suit any operator
- Delivers 10,000/9,000 RPM for faster cutting (Plastic blade / Nylon cutting head)
- Up to 38min. of run time on a single charge under no load using BL1041B
- eXtreme Protection Technology (XPT) is engineered for improved dust and water resistance for operation in harsh conditions



Cutting Width	Nylon Cutting Head: 260 mm (10")
	Plastic Blade: 230 mm (9")
No Load Speed (RPM)	Nylon Cutting Head: 9,000
	Plastic Blade: 10,000
Spindle Size	M8 x 1.25 RH
Dimensions (L x W x H)	835 - 1,185x267x210 - 315 mm
Net weight	2.1 - 2.3 kg

Standard Equipment: Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Plastic Blade, Accessory Bag, Hex Wrench.

UM600D

Cordless Grass Shear

4.0Ah, Z



Hedge Trimmer blade
(only with "Z" version)

Universal design for Grass shear and Hedge trimmer use

- Slimmer handle, More runtime, High performance
- Up to 90 minutes continuous run time (4.0Ah battery)
- Cutting depth adjustment: 15/ 20/ 25 mm
- 2 in 1: Both trimmer blade and shear blade can be attached



Cutting Width	160 mm
Strokes Per Minute (SPM)	2,500
Cutting height adjustment	15, 20, 25mm
Dimensions (L x W x H)	329x177x131mm
Net weight	1.4 kg (with battery)

Standard Equipment: Grass shear blade, Hedge trimmer blade (only with "Z" version), Blade Cover, Base Frame, Grass and Chip receiver.

RUNTIME COMPARISON

Batteries for 18V LXT

ONLY 3.0Ah, 5.0Ah and 6.0Ah



Batteries 12V MAX CXT

ONLY 2.0Ah and 4.0Ah



CORDLESS GRASS TRIMMER & CORDLESS STRING TRIMMER - No load continuous runtime (approx.): min

Battery LXT 18V		BL1860B	BL1850B	BL1830B
DUR364L	Nylon cutting head	Hi: 57, Low: 120	Hi: 48, Low: 100	Hi: 28, Low: 58
DUX60	Nylon cutting head	Hi: 26, Mid: 43, Low: 117	Hi: 21, Mid: 35, Low: 97	Hi: 12, Mid: 20, Low: 56
DUR184L	Nylon cutting head	Hi: 66, Low: 101	Hi: 55, Low: 84	Hi: 31, Low: 48
DUR189	Nylon cutting head	Hi: 66, Mid: 100, Low: 168	Hi: 55, Mid: 83, Low: 139	Hi: 32, Mid: 48, Low: 81
	with Plastic blade	Hi: 123, Mid: 146, Low: 219	Hi: 102, Mid: 121, Low: 181	Hi: 59, Mid: 70, Low: 105
Battery 12V MAX			BL1041B	BL1021B
UR100D	with Nylon cord diameter: ø1.65mm Trimming width ø260mm		38	19
	with Plastic blade Trimming width: ø230mm		55	28

CORDLESS HEDGE TRIMMER - No load continuous runtime (approx.): min

Battery LXT 18V	BL1860B	BL1850B	BL1830B
DUH551	95 - 40	75 - 125	45 - 70
DUH483	155	130	75

CORDLESS BLOWER - Continuous runtime (approx.): min

Battery LXT 18V	BL1860B	BL1850B	BL1830B
DUB362	12 - 84	11 - 73	6.5 - 42
DUB361	Hi: 36, Low: 109	Hi: 30, Low: 92	Hi: 17, Low: 51
DUB182	Hi: 24	Hi: 20	Hi: 12

CORDLESS CHAIN SAW - Work amount (approx.): (Cut 50mm cedar timber with 91PX saw chain under the normal duty condition.)

Battery LXT 18V	BL1860B	BL1850B	BL1830B
DUC400	650	550	300
DUC252	670	560	340

OTHERS - No load continuous runtime (approx.): min *one battery

Battery LXT 18V	BL1860B	BL1850B	BL1830B
DLM431	37	30	18
DCU180*	60	50	30
DUM604	250	200	125
DVF104 (10L) (wide angle herbicide nozzle)	415	344	200

Battery 12V MAX	BL1041B	BL1021B
UM600D	90	45

4-STROKE ENGINE

Reliable and Environment Friendly




High Performance in Compact Design

Makita 4-Stroke Engine delivers high torque and horsepower. Max. Torque and horsepower of Makita 4-Stroke Engine are almost the same as those of an equivalent 2-Stroke engine.

Compared with the conventional 4-Stroke Engines, Makita 4-Stroke Engine produces approximately 20 to 30 % more power thanks to its high combustion efficiency and new developments such as compact spark plug.

Additionally, by employing a unique lubrication system, it has obtained the smallest in class exterior physical dimensions among the 4-Stroke Engines available in the market today.

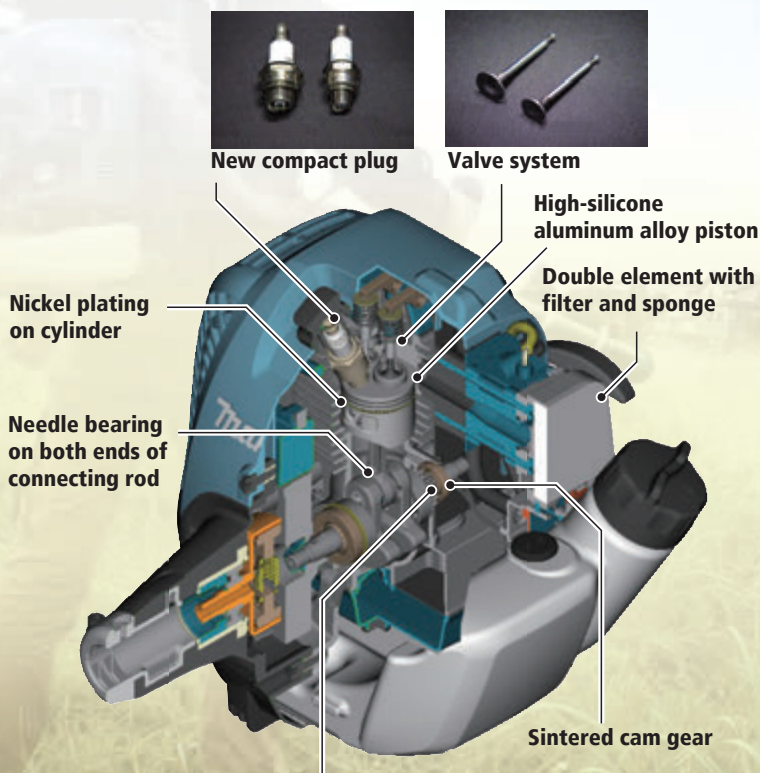


Decompression System:

The force required to pull the starter rope is drastically reduced by the Automatic decompression system that features our original centrifugal structure in the cam gear.

Patented unique lubrication system enables to use 4-Stroke Engine in full multi-position

Employing this system enables to use 25.4mL Brushcutters on any slope such as ditch slopes, river banks or mountain woods. The natural pressure changes in the crankcase caused by the piston movement in the cylinder are harnessed to pump the oil throughout the engine. Oil is pumped from a reservoir in the base of the engine through a network of one-way valves for reliable lubrication and long service life without the need to keep the engine level.

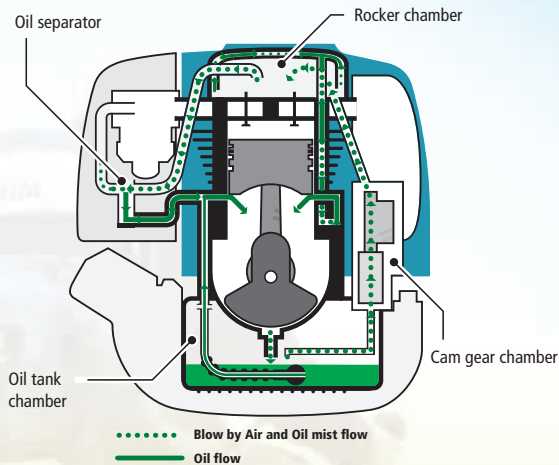

Easy Maintenance

Makita 4-Stroke Engine uses straight unleaded gasoline. Operator can, therefore, skip the following preparation and maintenance required when using 2-Stroke or 4-mix engine that runs on gas/oil mixture:

- /// Mixing gasoline and oil before operation
- /// Removing fuel from tank after operation, then sweeping dust from oil filling port
- /// Removing fuel is recommended for 4-Stroke engine at the end of season

Low Running Cost

From our comparison test between Makita 4-Stroke Petrol Brushcutter and an equivalent 2-Stroke Petrol Brushcutter, the superiority of Makita 4-Stroke Engine over 2-Stroke Engine in its class has been proved both in fuel consumption and total cost as shown in the charts below.

Low Noise

Low noise level allows to operate without disturbing others even in quiet places such as parks or residential areas.

Chain Saws



Double Insulation



Torque Limiter



Automatic Oiling



Soft Start



Brake



Anti Vibration



Rapid Start



Chain Brake



Primer Pump



Two Stroke



Decompression Valve



Capacitor Discharge Ignition

High Power & Higher Maneuverability

Petrol Chain Saw EA4301F45B: 450mm (18")



1 Easy Start:

Spring assisted starter combined with optimized engine management significantly reduces resistance



2 Centrifugal clutch with 3 weights for good power transfer to the chain



3 Touch & Stop one lever

Control with clearly defined positions for cold starting, operation and stop. Engines shuts off with just a touch.



4 Lateral chain tensioning provides easy operator access

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

EA3502S40B 400mm (16")**Petrol Chain Saw**
Entry Class**Entry class chain saw for home and garden with more power**

- Touch & Stop switch for easy operating
- Environment-friendly 2-stroke engine
- Compact and lightweight body for better handling



Standard guide bar	400mm (16")
Saw chain	Pitch: 3/8"
	Gauge: 1.1mm (0.043") / 1.3mm (0.050")
Displacement	35.0mL
Engine power	1.7kW / 2.4PS
Fuel tank	101.8dB(A)
Chain oil tank	111.8dB(A)
Dimensions (L x W x H)	415x247x273mm
Power head weight	4.4kg

Standard Equipment: Chain Blade, Guide Bar Cover, Wrench.**EA4301F45B 450mm (18")****Petrol Chain Saw**
Semi-professional**NEW****High power and low fuel consumption**

- Stratified scavenging 2-stroke engine has achieved low fuel consumption and reduced noxious exhaust emissions
- Centrifugal air cleaner for enhanced air filtration
- Magnesium diecasting housing



Guide bar length	450mm (18")
Saw chain	Pitch : 3/8 "
	Gauge: 1.3 mm
Displacement	42.4 mL
Engine power	2.2 kW
Fuel Tank Capacity	0.48 L
Chain Oil Tank Volume	0.28 L
Dimensions (L x W x H)	416x248x279 mm
Power head weight	4.8 kg

Standard Equipment: Saw Chain, Guide Bar, Guide Bar Cover, Socket Wrench, Hex Wrench, Screwdriver.**DCS5200 450mm (18")****Petrol Chain Saw**
Semi-professional**Extra-rugged engine for max. performance in extra-tough jobs**

- Chill cast cylinder.
- Double air filtration system.
- Inertia chain brake



Standard guide bar	450mm (18")
Chain Blade	Pitch: 3/8"
	Gauge: 0.058"
Displacement	52mL
Power rating	2.7kW / 3.7PS
Fuel tank	0.56L
Chain oil tank	0.28L
Power head weight	4.6kg

Standard Equipment: Chain Blade, Guide Bar Cover, Wrenches.**DCS230T 250mm (10")****Petrol Chain Saw**
Professional**TO BE DISCONTINUED****Weighs only 2.5kg (5.5lbs)& Easy Start System.**

- Easy to handle for pruning orchard and park trees
- Employment of the "Lift-up" type carburetor allows idling start to prevent the chain blade running at start-ups



Standard guide bar	250mm (10")
Chain Blade	Pitch: 1/4"
	Gauge: 0.050"
Displacement	22.2 mL
Power rating	0.74kW / 1.02PS
Fuel tank	0.2L
Chain oil tank	0.19L
Power head weight	2.5kg

Standard Equipment: Chain Blade 250mm (25AP60-E for carving bar or 91VG40-E for sprocket nose bar), Guide Bar (Carving bar or Sprocket nose bar), Guide Bar Cover, Wrench 2, 16-13 Stroke Oil (100ml).

DCS6401 500mm (20")**Petrol Chain Saw
Professional****Professional chain saw with ergonomic designed body**

- Improved air filtration through the Airmaster ® air filter system
- Simpler starting through semi automatic half-throttle stop
- Vibration damping with tough, long-life steel springs
- Rapid start



Standard guide bar	500mm (20")
Chain Blade	Pitch: 3/8"
	Gauge: 0.058"
Displacement	64 mL
Power rating	3.5kW / 4.8PS
Fuel tank	0.75L
Chain oil tank	0.42L
Power head weight	6.3kg

Standard Equipment: Chain Blade, Guide Bar Cover, Wrench, 2 Stroke Oil (100ml).

EA6100P 600mm (24")**Petrol Chain Saw
Professional****Ergonomically designed down to micromillimeter for professionals**

- High performance engine
- Low vibration system with damper springs to absorb vibration from engine to integrated front and rear handles
- Easy start with spring assisted recoil starter reduces user's fatigue



Guide bar length	600mm (24"), 500mm (20"), 450mm (18"), 380mm (15")
Saw chain	Pitch: 0.325 or 3/8"
	Gauge: 1.5mm (.058")
Displacement	60.7mL
Engine power	3.4kW / 4.6PS
Fuel Tank Capacity	0.8L
Chain Oil Tank Volume	0.48L
Dimensions (L x W x H)	435x243x312mm
Power head weight	6.0kg

Standard Equipment: Guide Bar, Saw Chain, Guide Bar Cover, Socket Wrench, Screwdriver.

DCS7301 600mm (24")**Petrol Chain Saw
Professional****Professional chain saw with ergonomic designed body.**

- Improved air filtration through the Airmaster ® air filter system.
- Simpler starting through semi automatic half-throttle stop.
- Vibration damping with tough, long-life steel springs.
- Rapid start.



Standard guide bar	600mm (24")
Chain Blade	Pitch : 3/8"
	Gauge : 0.058"
Displacement	72.6 mL
Power rating	4.2kW / 5.7PS
Fuel tank	0.75L
Chain oil tank	0.42L
Power head weight	6.3kg

Standard Equipment: Chain Blade, Guide Bar Cover, Wrench, 2 Stroke Oil (100ml).

DCS7901 700mm (28")**Petrol Chain Saw
Professional****Professional chain saw with ergonomic designed body.**

- Improved air filtration through the Airmaster ® air filter system.
- Simpler starting through semi automatic half-throttle stop.
- Vibration damping with tough, long-life steel springs.
- Rapid start.



Standard guide bar	700mm (28")
Chain Blade	Pitch : 3/8"
	Gauge : 0.058"
Displacement	78.5 mL
Power rating	4.6kW / 6.3PS
Fuel tank	0.75L
Chain oil tank	0.42L
Power head weight	6.3kg

Standard Equipment: Chain Blade, Guide Bar Cover, Wrench, 2 Stroke Oil (100ml).

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V LXT
18V LXT
10.8V/ 12VMAX CXT
Chain Saws
Hedge Trimmers
Brush Cutters/ String Trimmers
Lawn Mowers
Blowers
Others
Power Cutters
Generators
Accessories

DCS9010 740mm (30")

Petrol Chain Saw
Professional

(Heavy Felling)



Heavy timber saw for the hardest working professionals.

- Armed with newly designed carburetor, ignition assembly, muffler and 7- tooth sprocket
- Max. engine speed 13,500rpm



Standard guide bar	740mm (40" / 34")
Chain Blade	Pitch: 3/8"
	Gauge : 0.058"
Displacement	90 mL
Power rating	4.9kW / 6.7PS
Fuel tank	1L
Chain oil tank	0.4L
Power head weight	8.2kg

Standard Equipment: Chain Blade, Guide Bar Cover, Wrench, Screwdriver, 2 Stroke Oil (100ml).

EY2650H25H 25.4mL 4-stroke

Telescopic Petrol Pole Saw



Telescopic petrol pole saw loaded with a 25.4mL Makita -4stroke engine

- Light-weight pole saw head for reduced operator fatigue
- In compliance with main exhaust emission regulations, including the regulations of San Dimas
- Multi-position lubrication system enables the engine to be inclined to any angle for continuous operation without emission of the white smoke and the smell of burning engine oil



Displacement	25.4mL
Engine power	0.77kW / 1.1PS
Fuel tank	0.6L
Guide bar length	255mm (10")
Chain blade	Gauge: 1.3mm (0.050")
	Pitch: 3/8"
Dimensions (L x W x H)	2,720 x 223 x 240mm
Net weight	7.2kg

Standard Equipment: Chain blade with guide bar and guide bar cover, 80ml 4T engine oil, Shoulder harness, Safety goggle, Tool set, Accessory bag.

UC4041A 400mm (16")

153

Electric Chain Saw**Tool-less saw chain / tension adjustment**

- Improved oil pump keeps the delivery of chain oil constant regardless of temperature and the oil viscosity
- Large view window of Oil tank allows operator to easily check oil level
- Large separate-type metal spike bumper - The spike grips workpiece firmly to provide more control



Continuous rating input	1,800W
Chain speed per minute	870m/min (2,900ft/min)
Guide bar length	400mm (16")
Chain blade	Pitch: 3/8"
	Gauge: 0.043"/0.050"
Dimensions (L x W x H)	455x245x200mm
Net Weight	4.8kg
Power supply cord	0.3m

Net weight & Dimensions are without blade and guide bar

Standard Equipment: Chain Blade, Guide Bar Cover, Hook Complete.**UC4551A 450mm (18")**

153

Petrol Chain Saw**Longitudinal motor provides better maneuverability**

- Tool-less chain / tension adjustment
- Newly designed nut-fix style sprocket cover to hold Saw chain and Guide bar with two nuts
- Improved oil pump keeps the delivery of chain oil constant
- Increased oil tank capacity - 200mL



Standard guide bar	600mm (24")
Chain Blade	Pitch : 3/8"
	Gauge : 0.058"
Displacement	72.6 mL
Power rating	4.2kW / 5.7PS
Fuel tank	0.75L
Chain oil tank	0.42L
Power head weight	6.3kg

Net weight & Dimensions are without blade and guide bar

Standard Equipment: Chain Blade, Guide Bar, Guide Bar Cover, Hook complete.18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

Hedge Trimmers



Double Insulation



Brake



Anti Vibration



Primer Pump



Auto Decompression



Torque Limiter



Capacitor Discharge Ignition

UH5261 520mm (20-1/2")

419

Electric Hedge Trimmer
Home Users

Ergonomically designed grip provides more control and comfort while minimizing hand fatigue

- Stain-free shear blade surface obtained by non-electrolyzed nickel plating that features high anti-abrasion surface for a long lasting coating
- Protection of extension cord from breakage



Continuous rating Input	400W
Blade length	520mm (20-1/2")
Strokes per minute (spm)	3,200
Dimensions (L x W x H)	921 x 194 x 194mm
Net weight	3.0kg (6.5lbs)
Power supply cord	0.3m (0.98ft)

Standard Equipment: Blade Cover, Hook Complete, Cord holder Complete Set.

UH4570 450mm (17-3/4")

419

Electric Hedge Trimmer
Semi-Professional**TO BE DISCONTINUED**

Comfortable operation by ergonomically designed rubberized soft grip

- Three switches are installed in handle, front grip & sub grip
- Tool starts only when any two pair of the three switches are pressed at the same time
- Guard is provided at the tip of blades to prevent kick-back
- Blades are coated to improve durability



Continuous rating Input	550W
Blade length	450mm (17-3/4")
Strokes per minute (spm)	3,200
Dimensions (L x W x H)	862 x 223 x 206mm
Net weight	3.5kg (7.7lbs)
Power supply cord	0.3m (0.98ft)

Standard Equipment: Blade Cover, Hook Complete, Belt Hook.

UH6570 650mm (25-1/2")

419

Electric Hedge Trimmer
Semi-Professional

Comfortable operation by ergonomically designed rubberized soft grip

- Three switches are installed in handle, front grip & sub grip
- Tool starts only when any two pair of the three switches are pressed at the same time
- Guard is provided at the tip of blades to prevent kick-back
- Blades are coated to improve durability



Continuous rating Input	550W
Blade length	650mm (25-1/2")
Strokes per minute (spm)	3,200
Dimensions (L x W x H)	1,042 x 223 x 206mm
Net weight	3.7kg
Power supply cord	0.3m (0.98ft)

Standard Equipment: Blade Cover, Hook Complete, Belt Hook.

UH7580 750mm (29-1/2")

419

Electric Hedge Trimmer
Professional

High power and superior operation

- Ergonomically designed rubberized soft grips provide more control and comfort
- Three switches are installed in handle, front grip & sub grip
- Tool starts only when any two pair of the three switches are pressed at the same time
- Guard is provided at the tip of blades to prevent kick-back
- Blades are coated to improve durability



Continuous rating Input	670W
Blade length	750mm (29-1/2")
Strokes per minute (spm)	3,000
Dimensions (L x W x H)	1,157 x 223 x 206mm
Net weight	4.6kg
Power supply cord	0.3m (0.98ft)

Standard Equipment: Blade Cover, Hook Complete, Belt Hook.

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12V/MAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

EH6000W 600mm (23-5/8")**Petrol Hedge Trimmer
Professional****Double sided blade and 5-position rear handle**

- Can be locked at "0" degree & "45"/"90" degrees left and right for vertical and angled trimming
- Longer lubrication cycle (approx. 50 hours) obtained by circulating grease in gear housing
- Shear blade with 3 sharpened edges and stain-free blade surface provide long lasting, smooth cutting
- Anti Vibration System



Blade Type	Double-sided
Blade Length	600mm (23-5/8")
Displacement	22.2mL
Power Rating	0.68kW (1.0PS)
Fuel mixture	50 : 1
Fuel tank	0.4L
Dimensions (LxWxH)	1,119x262x216mm
Net weight (without fuel)	5.0kg

Standard Equipment: Blade cover, Socket wrench, Hex wrench.**EH7500S 750mm (29-1/2")****Petrol Hedge Trimmer
Professional****Single sided blade**

- Longer lubrication cycle (approx. 50 hours) obtained by circulating grease in gear housing
- Shear blade with 3 sharpened edges and stain-free blade surface provide long lasting, smooth cutting
- Anti Vibration System
- Ergonomically angled and contoured grip of rear handle



Blade Type	Single-sided
Blade Length	750mm (29-1/2")
Displacement	22.2mL
Power Rating	0.68kW (1.0PS)
Fuel mixture	50 : 1
Fuel tank	0.4L
Dimensions (LxWxH)	1,150x323x212mm
Net weight (without fuel)	4.7kg

Standard Equipment: Blade cover, Tool set.**EH7500W 750mm (29-1/2")****Petrol Hedge Trimmer
Professional****The Lightest 22.2mL petrol hedge trimmer with
double-sided blade**

- Complying with any exhaust emission regulations in the world
- Rotatable handle is convenient for various style operation
- Forward exhaust direction for operator's health and comfort
- Long lubrication cycle
- Durable shear blade by special coating



Blade Type	Double-sided
Blade Length	750mm (29-1/2")
Displacement	22.2mL
Power Rating	0.68kW (1.0PS)
Fuel mixture	50 : 1
Fuel tank	0.4L
Dimensions (LxWxH)	1,259x262x216mm
Net weight (without fuel)	5.2kg

Standard Equipment: Blade cover, Tool set.**EN4950H 2,550mm (100-1/2")****Petrol Hedge Trimmer
Loop handle Type****Compact design for greater versatility**

- 45° tilt-up to 90° tilt-down from the horizontal position
- 180° foldable for easy transport and storage: Built-in clutch works to stop the blade motion even if the throttle lever is touched while 180° folding

Blade does not move while hedge trimmer head is 180° in the folded position



Blade length	490mm (19-1/4")
Displacement	25.4mL
Engine power	0.77kW / 1.1PS
Fuel Tank Capacity	0.6L
Strokes Per Minute (SPM)	4,200
Sound Pressure Level	90dB(A)
Sound Power Level	102.2dB(A)
Dimensions (L x W x H)	2,550x242x241mm
Net weight	6.9kg

Standard Equipment: Blade cover, Tool set, Accessory bag, Oil set, Shoulder strap.

Brush Cutters / String Trimmers



Double Insulation



Anti Vibration



Rapid Start



Primer Pump



Auto Decompression



Capacitor Discharge Ignition

18+18V
LXT18V
LXT10.8V/
12V/MAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

UR3000**Electric String Trimmer****Light weight AC string trimmers for do-it-yourselfers**

- Rigid aluminum pipe shaft
- Easy-to-change spool assembly
- Can be used as an edger



Continuous rating Input	450W
No load speed (rpm)	9,000
Dimensions (L x W x H)	1,110~1,310 x 310 x 260mm
Net weight	2.3kg
Power supply cord	0.3m

Standard Equipment: Spool assembly, Shoulder belt, Safety goggles.

RST250 24.5mL**Petrol String Trimmer****Light weight and handy string trimmer**

- Automatic / bump line feed trimmer head
 - Low noise and vibration
 - Solid state ignition for easy starting
 - Carburetor: Diaphragm-type
- Ignition system: Solid state ignition



Displacement	24.5 mL
Power rating	0.95KW / 1.3PS
Fuel tank	0.5L
Fuel mixture	25 : 1
Dimensions	1,490 x 300 x 485mm
Net weight	4.2kg

Net weight is without blade, harness and fuel

Standard Equipment: Trimmer head, Protector, Tool kit.

RBC2500 24.5mL**Petrol Brush Cutter****Commercial grade brush cutter**

- Heavy-duty straight shaft design with thicker pipe shaft
 - Sturdy solid steel drive shaft and heavy-duty gear box
 - Carburetor : Diaphragm-type,
- Ignition system : Solid state ignition



Displacement	24.5 mL
Power rating	0.73KW / 0.99PS
Fuel tank	0.5L
Fuel mixture	25 : 1
Dimensions (L x W x H)	1,770 x 620 x 410mm
Net weight	4.5kg

Net weight is without blade, harness and fuel

Standard Equipment: Blade, Single Harness, Goggle.

EM2650UH 24.5mL Four Stroke**Petrol Brush Cutter**

MM4
Makita mini 4-Stroke Engine



360°
MULTIPOSITION ENGINE

Maneuverable pole and handle

- Ergonomically designed rubberized soft grip provides more control and comfort
- Universal guard for both saw blade and Nylon cutter
- Light weight
- No choke at starting engine
- Good oil maintenance feature



Displacement	25.4mL
Engine power	0.77kW / 1.1PS
Fuel tank	0.6L
Spindle size	M10 X 1.25LH
Dimensions (L x W x H)	1,765 x 620 x 474mm
Net weight	5.5kg

Standard Equipment: Blade, Blade Cover, Harness, Socket Wrench, Hex Wrenches, Oil Bottle.

EM2500U 24.5mL Two Stroke**Petrol String Trimmer / Brush Cutter****Ergonomic handle bar of asymmetrical design**

- Enables user to work in a comfortable posture with less fatigue through out operation
- Provides easy handling



Displacement	24.5mL
Engine power	0.73kW / 1.0PS
Fuel tank	0.5L
Fuel mixture	50:1
Spindle Size	M8 x 1.25LH
Dimensions (L x W x H)	1,770 x 620 x 410 mm
Net weight	4.5kg

Standard Equipment: Star blade, String trimmer head (A-89143), Socket wrench, Hex wrench, Shoulder harness, Guard.

RBC411 40.2mL**Petrol Brush Cutter****Makita robust brush cutter ideal for professional brush-cutting**

- Powerful and reliable 40.2mL engine designed for professionals and minimizing your maintenance job
- The rigid drive shaft, durable gear head & aluminum post ensure top-performance
- Convenient swivel-post for any cutting positions
- Carburetor: Float-type, Ignition system: Solid state ignition



Displacement	40.2mL
Engine Power	1.40kW / 2.0PS
Fuel tank	1.1L
Fuel mixture	25 : 1
Dimensions	1,710 x 670 x 430mm
Net weight	7.3kg

Net weight is without blade, harness and fuel


Standard Equipment: Saw Blade, Protector, Harness, Tool set, Trimmer Head.

EM4350RH 43.0mL Four Stroke**Backpack Petrol Brush Cutter
(Multi-position 4-stroke engine)****43.0mL 4-stroke backpack brushcutter for real professionals**

- The flexible shaft between engine and shaft allowing efficiently work on slops undulating ground or in narrow space
- Professional-user type for superior maneuverability for heavy-duty applications in forestry and construction site area
- Able to start/stop engine while carrying machine
- Less recoil pulling power by mechanical decompression
- Low vibration

**Easier maintenance**

Large oil filling port and Drain plug allow for easy oil change



Recoil starter designed for easier starting of the engine on the back

Comfortable backpack harness

with ergonomic design to reduce pain and fatigue



Thick and wide pad of shoulder straps
for comfortable operation

Back cushion
for keeping the best machine balance

Waist band
for better machine fitting on the operator



Displacement	43.0mL
Engine power	1.5kW / 2.1PS
Fuel tank	0.8L
Spindle size	M10 x 1.25LH
Sound pressure level	93dB(A)
Sound power level	111dB(A)
Dimensions (L x W x H)	358x280x587mm
Net weight	12.0kg

Standard Equipment: Metal blade or Nylon cutting head, Universal guard (Protector), Blade cover (for the product with metal blade), Tool set, Accessory bag, Oil bottle without oil or containing 100mL engine oil

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

Lawn Mowers



Double Insulation



Brake



Variable Speed



Primer Pump



Rapid Start

ELM3311 330mm (13")**Electric Lawn Mower**

Type: Push

Deck: Polypropylene

**Silent and without emission**

- Wheels tucked under body to enhance performance and to cut grass close to fences, curbs, walls etc
- Cutting height can be adjusted at 3 stages
- Grass box full indicator
- Compact & Stylish design
- Light weight plastic deck



Continuous rating Input	1,100W
Cutting width	330mm (13")
Cutting height	20, 40, 55mm (3/4", 1-5/8", 2-1/8")
Recommended mowing area	400m ²
Grass box capacity	27L
Dimensions (L x W x H)	600 x 460 x 320mm
Net weight	13.1kg

Standard Equipment: Hex wrench.**ELM3711 370mm (14-1/2")****Electric Lawn Mower**

Type: Push

Deck: Polypropylene

**Silent and without emission**

- Wheels tucked under body to enhance performance and to cut grass close to fences, curbs, walls etc
- Cutting height can be adjusted at 3 stages
- Grass box full indicator
- Compact & Stylish design
- Light weight plastic deck



Continuous rating Input	1,300W
Cutting width	370mm (14-1/2")
Cutting height	20, 40, 55mm (3/4", 1-5/8", 2-1/8")
Recommended mowing area	500m ²
Grass box capacity	35L
Dimensions (L x W x H)	650 x 490 x 350mm
Net weight	14.9kg

Standard Equipment: Hex wrench.**ELM4110 410mm (16-1/8")****Electric Lawn Mower**

Type: Push

Deck: Steel

**Increased maneuverability**

- Cutting height can be adjusted at 5 stages
- Light weight grass box
- Large throttle knob is easy to grip
- Plastic front cover protects the steel deck



Continuous rating Input	1,600W
Cutting width	410mm (16-1/8")
Cutting height	20, 32, 44, 60, 75mm
Recommended mowing area	600m ²
Grass box capacity	50L
Dimensions (L x W x H)	760 x 500 x 410mm
Net weight	25.8kg

Standard Equipment: Munching kit, Hex Wrench.**ELM4612 460mm (18-1/8")****Electric Lawn Mower
Self Propelling Function**

Type: Push

Deck: Steel

**Increased maneuverability**

- Wheels tucked under body to enhance performance & to cut grass close to fences, curbs, walls etc
- Cutting height can be adjusted at 8 stages
- Grass box full indicator
- Compact & Stylish design
- Plastic front cover protects the steel deck
- Easy to grip large throttle knob



Continuous rating Input	1,800W
Cutting width	460mm (18-1/8")
Cutting height	20, 25, 30, 38, 46, 55, 64, 75mm
Recommended mowing area	800m ²
Grass box capacity	60L
Dimensions (L x W x H)	785 x 560 x 380mm
Net weight	29.5kg

Standard Equipment: Munching kit, Hex Wrench.18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12V/MAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

ELM4613 460mm (18-1/8")**Electric Lawn Mower****Self Propelling Function**

Type: Self propelled

Deck: Steel

**Self propelled electric lawn mower with rear wheel drive**

- Wheels tucked under body to enhance performance & to cut grass close to fences, curbs, walls etc
- Cutting height can be adjusted at 8 stages
- Grass box full indicator
- Compact & Stylish design
- Plastic front cover protects the steel deck
- Easy to grip large throttle knob



Continuous rating Input	1,800W
Cutting width	460mm (18-1/8")
Cutting height	20, 25, 30, 38, 46, 55, 64, 75mm
Propelling speed	3.6km/h
Recommended mowing area	1,000m ²
Grass box capacity	60L
Dimensions (L x W x H)	785 x 560 x 380mm
Net weight	32.5kg

Standard Equipment: Mulching kit, Hex Wrench.**PLM4120N 410mm (16-1/8")****Petrol Lawn Mower**

Type: Push

Deck: Steel

**Increased maneuverability**

- Light weight grass box
- Cutting height can be adjusted at 5 stages by one handle
- Large throttle knob is easy to grip
- Rubber tire for gripping lawn
- Plastic front cover protects the steel deck



Engine	B&S500E, 140mL
Cutting width	410mm (16-1/8")
Cutting height	25, 31, 43, 56, 70mm
Recommended mowing area	1,000m ²
Grass box capacity	50L
Dimensions (L x W x H)	760 x 500 x 410mm
Net weight	26.0kg

Standard Equipment: Mulch Plug.**PLM4620N2 460mm (18-1/8")****Petrol Lawn Mower****Excellent quality petrol lawn mower for long life and easy work**

- Lightweight grass box
- Central height adjustment with 5 positions
- Large knob is easy to grip. Rubber tire with ball bearing for good gripping lawn
- Plastic front cover protects the steel deck
- Side discharge function and Edge cutting function is added



Engine	B&S625E R/S, 150mL
Cutting width	460mm (18-1/8")
Cutting height	25, 31, 43, 56, 70mm
Recommended mowing area	1,200m ²
Grass box capacity	60L
Dimensions (L x W x H)	800 x 540 x 400mm
Net weight	27.6kg

Standard Equipment: Mulch Plug.**PLM4621N 460mm (18-1/8")****Petrol Lawn Mower**

Type: Self propelled (Single speed)

Deck: Steel

TO BE DISCONTINUED**Self propelled petrol lawn mower**

- Light weight grass box
- Cutting height can be adjusted at 5 stages by one handle
- Large throttle knob is easy to grip
- Rubber tire for gripping lawn
- Plastic front cover protects the steel deck



Engine	B&S650 R/S, 190mL
Cutting width	460mm (18-1/8")
Cutting height	25, 31, 43, 56, 70mm
Propelling speed	3.6km/h
Recommended mowing	1,400m ²
Grass box capacity	60L
Dimensions (L x W x H)	810 x 560 x 440mm
Net weight	33.8kg

Standard Equipment: Mulch Plug.

PLM4621N2 460mm (18-1/8")**Petrol Lawn Mower**

Type: Self Propelling (Single Speed)

**Excellent quality petrol lawn mower for long life and easy work**

- Lightweight grass box
- Central height adjustment with 5 positions
- Large knob is easy to grip. Rubber tire with ball bearing for good gripping lawn
- Plastic front cover protects the steel deck
- Side discharge function and Edge cutting function is added



Engine	B&S650EXI R/S, 163mL
Cutting Width	460mm (18-1/8")
Cutting Height	25 - 70 mm (1" - 2-3/4")
Propelling speed	3.6km/h
Recommended mowing area	1,400m ²
Grass box capacity	60L
Dimensions (L x W x H)	800x540x410mm
Net weight	31.0kg

Standard Equipment: Mulch Plug.**PLM4622N 460mm (18-1/8")****Petrol Lawn Mower**

Type: Self Propelling

TO BE DISCONTINUED**Self propelled petrol lawn mower**

- Lightweight grass box
- Cutting height can be adjusted at 5 stages by one handle
- Large throttle knob is easy to grip
- Rubber tire for gripping lawn
- Plastic front cover protects the steel deck



Engine	B&S675EXI S/R, 190mL
Cutting Width	460mm (18-1/8")
Cutting Height	25 - 70 mm (1" - 2-3/4")
Propelling speed	3 - 4.5km/h
Recommended mowing area	1,800m ²
Grass box capacity	60L
Dimensions (L x W x H)	810x560x440mm
Net weight	35.4kg

Standard Equipment: Mulch Plug.**PLM5113N2 510mm (20")****Petrol Lawn Mower**

Type: Self Propelling (Three Speed)

**Excellent quality petrol lawn mower for long life and easy work**

- Large knob is easy to grip. Rubber tire with ball bearing for good gripping lawn
- Plastic front cover protects the steel deck
- Side discharge function and Edge cutting function is added
- Powerful engine with ready start function for easy start



Engine	B&S675EXI R/S, 163mL
Cutting Width	510mm (20")
Cutting Height	25 - 70 mm (1" - 2-3/4")
Propelling speed	3-4.5km/h
Recommended mowing area	2,000m ²
Grass box capacity	65L
Dimensions (L x W x H)	890x570x440mm
Net weight	36.0kg

Standard Equipment: Mulch Plug.**PLM5117P 510mm (20")****Petrol Lawn Mower**

Type: Push

Deck: Aluminium

TO BE DISCONTINUED**Push type lawn mower with Aluminium deck**

- Powerful Briggs & Stratton engine with easy start engine
- Aluminium deck
- Large wheels with ball bearings
- Solid plastic grass box



Displacement	B&S 850 series I/C, ready start, 122Q
Engine displacement	190mL
Blade width	510mm
Cutting height	20-70 mm
Cut height adjustment	5 adjustment
Fuel tank capacity	1.1L
Grass catcher capacity	60L
Net weight	36.5kg

Standard Equipment: Mulch Plug.18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

Blowers



Double Insulation



Electronic 2-Speed



Variable Speed



Primer Pump



Auto Decompression



Anti Vibration



Capacitor Discharge
Ignition

UB0801V

Blower (with vacuum kit)



1,650 W Variable 2-Speed Blower

- 1,650 W powerful motor for high performance in vacuum and blower applications
- Converts to vacuum and leaf shredder with optional vacuum kit
- Blades on internal fan shreds the bulky leaves to reduce the collected volume in dust bag to 1/8 with optional vacuum kit mounted
- Slide switch air volume selection (High / Low settings)
- Maximum air volume of 7.1 m³/min for faster clean up in larger areas



Continuous rating input	1,650W
Max Air Volume (Blower)	High / Low: 7.1 / 3.6 m³/min
Max Air Velocity (Blower)	High / Low: 83 / 42 m/s
Max Air Volume (Vacuum)	11 m³/min
Air Pressure	4.1 kPa (418 mmH. O)
Dust Bag Capacity	35 L (1,190 oz.)
No Load Speed (RPM)	High / Low: 17,000 / 9,000
Dimensions (L x W x H)	with Blower Nozzle: 810x220x300mm, with Vacuum Nozzle: 1,180x220x560 mm
Net weight	3.2 kg
Power supply cord	2.5 m

Standard Equipment: Nozzle, Vacuum attachment kit.

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
Trimmers

UB1102

303

Blower



600 W Blower

- Delivers a maximum air speed of 91m/s for faster job site clean up
- Maximum air volume of 4.1m³/min for faster clean up in larger areas
- Two tools in one; quickly converts to a vacuum for added versatility
- Ergonomic handle with soft grip designed for increased operator comfort



Continuous rating input	600W
Max Air Volume	4.1 m³/min
Max Air Velocity	91 m/s
Air Pressure	5.7 kPa
No Load Speed (RPM)	16,000
Dimensions (L x W x H)	479x185x178 mm
Net weight	1.9 - 2.2 kg
Power supply cord	2.5 m

Standard Equipment: Nozzle, Dust Bag.

UB1103

303

Blower



600 W Blower

- Delivers a maximum air speed of 91m/s for faster job site clean up
- Maximum air volume of 4.1m³/min for faster clean up in larger areas
- Two tools in one; quickly converts to a vacuum for added versatility
- Ergonomic handle with soft grip designed for increased operator comfort



Continuous rating input	600W
Max Air Volume	0 - 4.1 m³/min
Max Air Velocity	0 - 91 m/s
Air Pressure	0 - 5.7 kPa
No Load Speed (RPM)	0 - 16,000
Dimensions (L x W x H)	479x185x178 mm
Net weight	1.9 - 2.2 kg
Power supply cord	2.5 m

Standard Equipment: Nozzle, Dust Bag.

Lawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

EB7660TH 75.6mL**Petrol Blower**
Tube-mounted throttle**MM4****High power and lightweight**

- Low vibration for reduced operator stress and fatigue
- Easy-to-pull recoil starter
- Comfortable backpack harness
- Adjust straps to provide a perfect fit for every user



Displacement	75.6 mL
Power Rating	3.0 kW (4.1 PS)
Max Air Volume	20 m³/min (706 CFM)
Max Air Velocity	92 m/s (205 MPH)
Fuel Tank Capacity	1.9 L (64 oz.)
No Load Speed (RPM)	2,800 - 7,200
Dimensions (L x W x H)	332x460x480 mm
Net weight	11.9 - 12.1 kg

Standard Equipment: Oil bottle set, Box Wrench, Driver, Flexible Pipe, Swivel Pipe, Hose Clamp, End nozzle, Flat Nozzle, Long Pipe, Short Pipe, Accessory Bag, Cable Holder.

EB5300TH 52.5mL**Petrol Blower**
Tube-mounted throttle**MM4****High power and lightweight**

- Low vibration for reduced operator stress and fatigue
- Easy-to-pull recoil starter
- Comfortable backpack harness
- Adjust straps to provide a perfect fit for every user



Displacement	52.5 mL
Power Rating	1.8 kW (2.5 PS)
Max Air Volume	15 m³/min (516 CFM)
Max Air Velocity	98 m/s (220 MPH)
Fuel Tank Capacity	1.8 L (61 oz.)
No Load Speed (RPM)	2,800 - 6,400
Dimensions (L x W x H)	320x450x475 mm
Net weight	9.8 - 10.1 kg

Standard Equipment: Oil bottle set, Box Wrench, Driver, Flexible Pipe, Swivel Pipe, Hose Clamp, End nozzle, Flat Nozzle, Long Pipe, Short Pipe, Accessory Bag, Cable Holder.

BHX2500 24.5 mL**Petrol Blower****MM4****24.5 mL MM4 Hand Held Blower**

- 65 m/s high air speed with 10.1 m³/min high air volume for commercial-duty performance
- Compact and lightweight with slim body: Easy to carry and to handle with one hand
- Soft grip for less vibration, and convenient cruise control lever for reduced operator fatigue
- Low noise: Large capacity muffler ensures quieter operation



Displacement	24.5 mL
Power Rating	0.81 kW
Max Air Volume	10.1 m³/min (356 CFM)
Max Air Velocity	65 m/s (145 MPH)
Fuel Tank Capacity	0.52 L (17.6 oz.)
No Load Speed (RPM)	3,500 - 7,800
Dimensions (L x W x H)	350x231x368 mm
Net weight	4.5 kg

Net weight: w/o Fuel, With Blower pipe, Overall length: w/o Blower pipe
Standard Equipment: Pipe, Nozzle, Socket Wrench.

PM7650H 75.6 mL**Petrol Mist Blower****MM4****75.6 mL MM4 Mist Blower**

- Efficient 4-Stroke Engine, No Fuel Mix Required
- Powerful fuel efficient 75.6 mL, MM4 4-stroke, commercial duty engine
- L-shaped chemical tank lowers center of gravity for improved balance
- Single action switch to activate liquid chemical flow
- Padded shoulder straps retain their shape for easier re-shouldering



Displacement	75.6 mL
Fuel Tank Capacity	1.8 L
Max Air Volume	14.1 m³/min (497 CFM)
The velocity of the wind (without blower pipes)	85 m/s
Dimensions (L x W x H)	420x440x595 mm
Net weight	13.9 kg

Net weight: w/o fuel with blower pipe, Overall length: w/o blower pipes
Standard Equipment: Oil Bottle, Hand Strap, Screwdriver, Diffusion cover, Hose Clamp, Flexible Pipe, Straight Pipe.

Others



Primer Pump



Auto Decompression



Capacitor Discharge Ignition

18+18V
LXT18V
LXT10.8V/
12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

EE2650H 24.5mL 4-Stroke**Petrol Edger****MM4****25.4mL MM4 Edger**

- Equipped with environment-friendly and cost-saving 25.4mL 4-stroke engine
- Multi-position engine lubrication system
- Straight shaft (solid shaft)
- Plate on gear housing for protection against contact to concrete etc



Displacement	25.4 mL
Engine power	0.77 kW / 1.1 PS
Fuel Tank Capacity	0.6 L
Sound Pressure Level	88.6 dB(A)
Sound Power Level	98.4 dB(A)
Dimensions (L x W x H)	1,773x242x315 mm
Net weight	6.6 kg

Net weight : without harness and fuel**Standard Equipment:** Blade, Socket Wrench, Hex Wrench, Accessory Bag, Oil Bottle.**EX2650LH 24.5mL 4-Stroke****Multi Function Power Head****MM4****25.4mL MM4 Multi Function Power Head and versatile optional attachments / accessories ***

- Environment-friendly and cost-saving 25.4cc 4-stroke engine
- Patented lubrication system enables Makita 4-Stroke Line Trimmers to be used on any angle and slope
- Multi-tool system consisting of the power head and versatile optional attachments
- Makita Mini 4-Stroke motors offer cleaner exhaust emissions and reduced fuel consumption



Displacement	25.4 mL
Engine power	0.77 kW / 1.1 PS
Fuel Tank Capacity	0.6 L
Dimensions (L x W x H)	975x323x241 mm
Net weight	4.6 kg


Net weight : without blade, harness and fuel**Standard Equipment:** Harness, Socket Wrench, Hex Wrench, Oil set, Accessory Bag. * Refer to page no. 66 for attachments / accessories**EF1550RH 24.5mL 4-stroke****Sprayer****MM4**

Displacement	24.5mL
Fuel Tank Capacity	0.5L
Max pressure	1.18Mpa (12kgf/cm²)
Chemical tank	15L
Dimensions (L x W x H)	354x395x570mm
Net weight	7.9kg

EVH2000 24.5mL 4-stroke**Sprayer****MM4**

Displacement	24.5mL
Fuel Tank Capacity	0.5L
Max pressure	2.5Mpa (25kgf/cm²)
Chemical tank	20L
Dimensions (L x W x H)	380x420x635mm
Net weight	9.1kg

High Pressure Washer & Submersible Pump

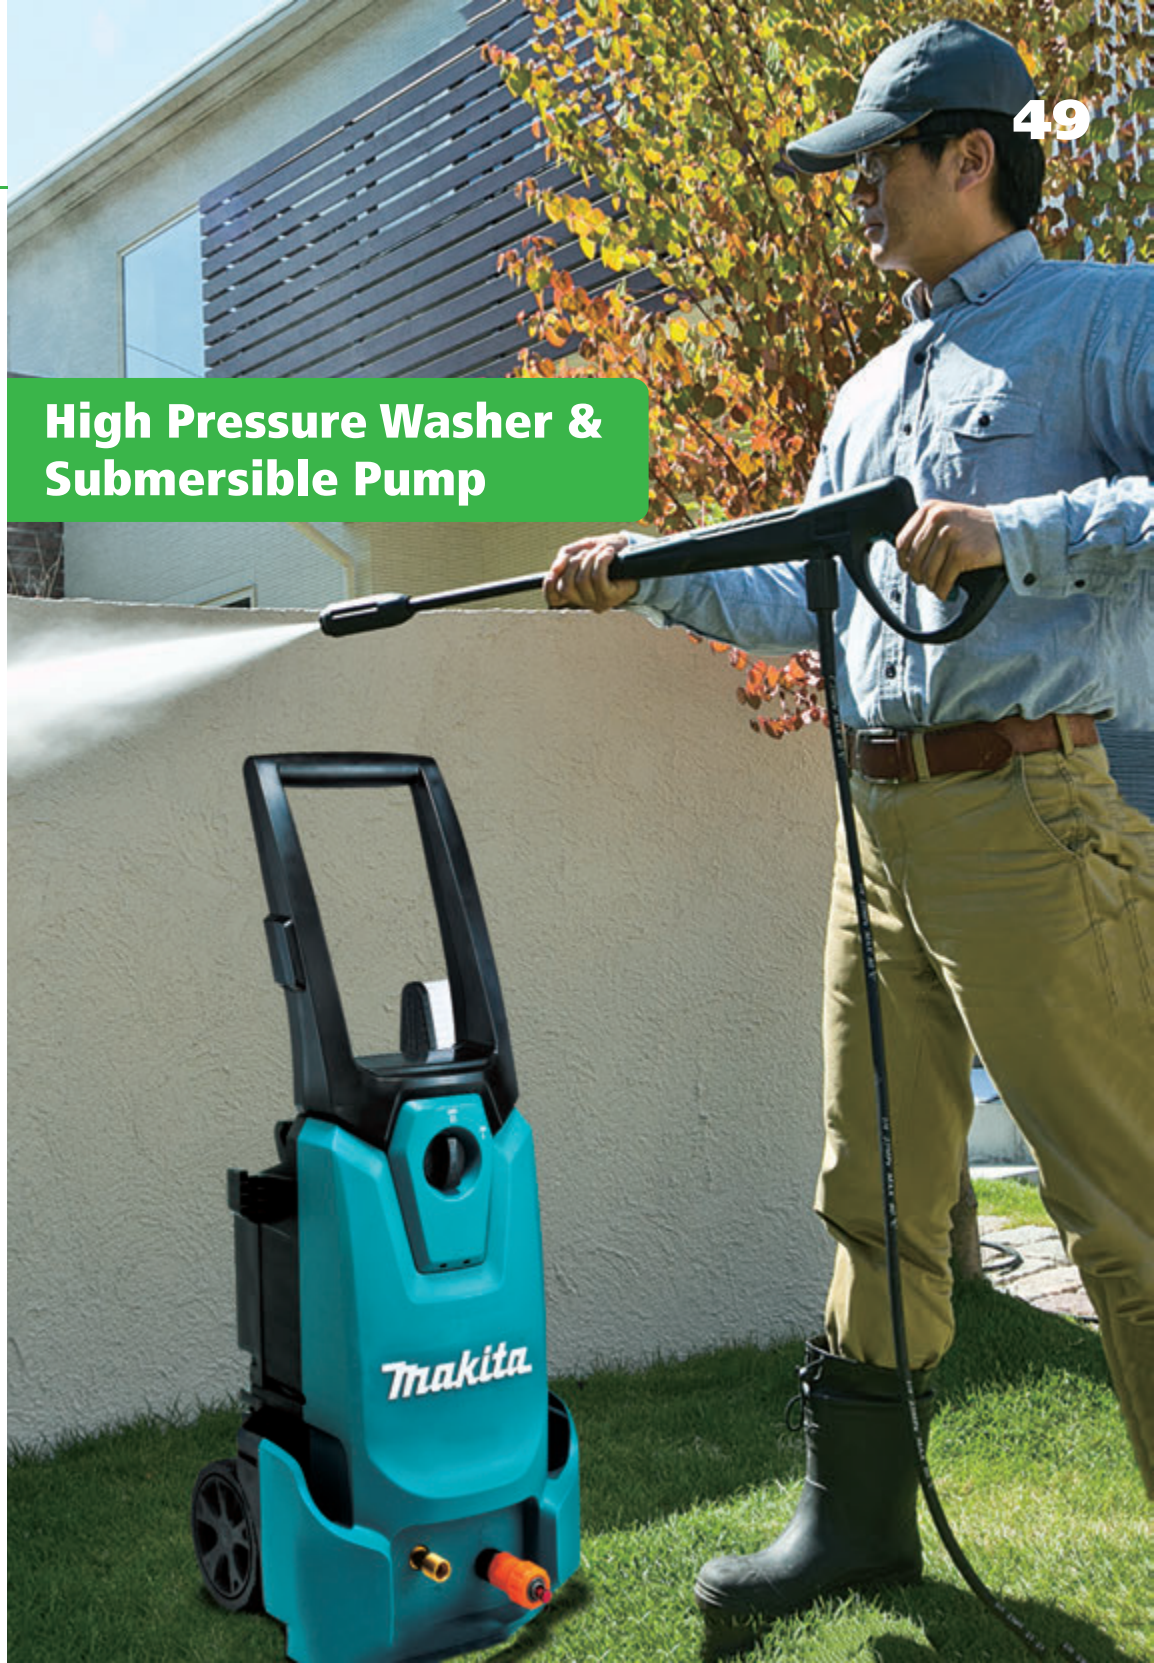

HW1200 / HW1300 HIGH PRESSURE WASHERS

Powerful, Eco Friendly, Low Vibration

With Makita-built 1,800W series Motor

10 m high pressure hose for various applications

Long, superflex, scratch-proof, anti-kink

On-board storage

for straightforward setup and accessory storage

Rear wheels for easy mobility

Integrated hose reel for easy storage

(only for HW1300)

Pressure adjustable function

for easy and quick control by turning the handle



High and Low Pressure Selection

(only for HW1300)

Low pressure mode enables soft washing of screen door, air conditioner outdoor unit, car, etc



HW112**High Pressure Washer**
Domestic Use**Ideal for the home user**

- Built-in accessories holder
- Rubber tread wheels
- Built-in hose reel
- Quick connection accessories and steel armed hose

Maximum Pressure	Max 120 bar
Maximum Flow	370 L/hr
Induction Motor	1.6 kW 230V 50Hz
Hose Length	5.5 m
Net weight	16.2kg

Standard Equipment: Gun (metal type), Adjustable spray lance and Detergent head.

HW131**High Pressure Washer**
Professional Use**Ideal for industrial users**

- Is fitted with a triplex pump with ceramic coated pistons controlled by connecting a rod system for heavy duty tasks and prolonged use
- It is equipped with a wheeled trolley for easy moving and an integrated accessory holder for easy storage

Maximum Pressure	Max 130 bar
Maximum Flow	500 L/hr
Induction Motor	2.3 kW 230V 50Hz
Hose Length	15m
Net weight	33kg

Standard Equipment: Gun and lance with hi/low and pencil/fan adjustable nozzle, Rotopower turbo lance, on board detergent tank, pressure gauge, triplex plunger pump with connecting rod system.

HW132**High Pressure Washer**
Professional Use**Ideal for industrial users**

- Built in accessories holder
- Rubber tread wheels
- Built in hose reel
- Quick connection accessories and steel armed hose

Maximum Pressure	Max 140 bar
Maximum Flow	420 L/hr
Induction Motor	2,1 kW 230V 50Hz
Hose Length	8m
Net weight	15.5kg

Standard Equipment: Gun (metal type), Adjustable Spray Lance and Detergent head.

HW151**High Pressure Washer**
Professional Use**Ideal for industrial users**

- Built-in accessories holder
- Rubber tread wheels
- Built-in hose reel
- Swivel connection accessories, steel armed hose
- Brass head/ steel frame

Maximum Pressure	Max 150 bar
Maximum Flow	500 L/hr
Induction Motor	2,5 kW 230V 50Hz
Hose Length	10m
Net weight	26.9kg

Standard Equipment: Gun (metal type), Adjustable Spray Lance and Detergent head.

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

HW1200**High Pressure Washer****NEW****12 MPa (120 Bar) High Pressure Washer with Self-Priming Function**

- Pressure adjustable function for easy and quick control by turning the handle
- Makita-built powerful 1,800 W series motor provides up to 12 MPa (120 bar) for maximum cleaning power
- 420 L/hr max flow rate



Continuous rating input	1,800W
Max Pressure	12 MPa (120 bar, 1,740 PSI)
Max Flow Rate	420 L/h
Max Feed Temperature	40 °C (104 °F)
High Pressure Hose Length	10m (33 ft.)
Dimensions (L x W x H)	292x358x830mm
Net weight	11.0kg
Power supply cord	5.0m

Standard Equipment: Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10 m, Water Hose Connector, Foam Nozzle, Connector

**HW1300****High Pressure Washer****NEW****13 MPa (130 Bar) High Pressure Washer with Self-Priming Function**

- Pressure adjustable function and low noise mode
- Pressure adjustable function for easy and quick control by turning the handle
- Makita-built powerful 1,800 W series motor provides up to 13 MPa (130 bar) for maximum cleaning power
- 450 L/hr max flow rate



Continuous rating input	1,800W
Max Pressure	13 MPa (130 bar, 1,885 PSI)
Max Flow Rate	420 L/h
Max Feed Temperature	40 °C (104 °F)
High Pressure Hose Length	10m (33 ft.)
Dimensions (L x W x H)	292x358x830mm
Net weight	12.7kg
Power supply cord	5.0m

Standard Equipment: Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10 m, Water Hose Connector, Foam Nozzle, Connector

**PF0410****Submersible Pump Professional Use****Rigid plastic housing****Carrying Grip**

Comfortable transportation with solid and ergonomically formed handle

**Automatic protection**

Float switch automatically switches off the motor to protect the pump from running dry when the water level falls below the capacity, then automatically switches on when water level rises.

Double gasket with oil depot in between

Ensures a long life period of the engine unit

Continuous rating Input	400W
Suction & Discharge diameter	25mm (1")
Max. pumping capacity	140 L / min (37 gal/min)
Delivery head max	5m
Submersion depth	5m
Min. suction level	40mm (1-4/7")
Grain size inlet	35mm (1-3/8")
Dimensions (L x W x H)	160x168x345mm
Net weight	4.3kg
Power supply cord	10m

Standard Equipment: Elbow, Adaptor.

Power Cutters



Primer Pump



Anti Vibration



Decompression Valve



Capacitor Discharge Ignition



Rapid Start

18+18V
LXT18V
LXT10.8V/
12V/MAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

EK6100 305mm (12")**Power Cutter
2-Stroke**

Lightweight and compact design makes all position work easier

- Stratified scavenging system to save fuel and environment friendly
- Long-life air filter system with cyclone air routing
- Largest max. cutting depth and lowest vibration level
- Touch and stop switch



Wheel diameter	305mm (12")
Engine	61mL
Max. cutting depth	110mm (4-5/16")
No load speed (rpm)	5100
Circumferential speed	80m/s
Engine power	3.2kW / 4.4PS
Fuel tank	0.7L
Bore size	20mm
Overall length	675mm
Net weight	8.5kg

Standard Equipment: Cut-off wheel, Wrenches, Screwdriver.

EK7301WS 355mm (14")**Power Cutter
2-Stroke****355mm (14") 73 mL 2-Stroke Power Cutter**

- High performance with powerful 5.1 HP/73 cc. Engine
- Improved decompression valve and metering spring for precise fuel regulation at start up
- Ignition coil with start-support function stores electrical energy with each pull for easier start ups



Wheel Diameter	355 mm (14")
Engine	73 mL
Max cutting depth	122 mm (4-13/16")
Circumferential speed	80 m/s
Engine power	3.8 kW / 5.1 PS
Fuel Tank Capacity	1.1 L
Sound Pressure Level	99.6 dB(A)
Sound Power Level	109 dB(A)
Dimensions (L x W x H)	770x290x370mm
Net weight	10.1kg

EK8100WS 405mm (16")**Power Cutter
2-Stroke**

Powerful and Lightweight power cutter in this class

- Easy and time-saving cutting even though hardest materials
- Multi-functional switch lever: Choke, half throttle, and stopping can be controlled by a single switch lever
- More efficient engine cooling: Obtained by using starter cover with bigger air intake area and new flywheel
- Carburetor: Diaphragm type, Starter system: Recoil
- SLR muffler in compliance with all known exhaust emission regulations without using catalytic converter



Wheel diameter	405mm (16")
Engine	81 mL
Max. cutting depth	147mm (5-3/4")
Circumferential speed	80m/s
Engine power	4.5kW / 6.2PS
Fuel tank	1.1L
Bore size	25.4mm
Overall length	830mm
Net weight	10.6kg

Standard Equipment: Tools comes with water supply kit
(Trolley and foot with wheels are available as option)

EK7650H 305mm (12")**Power Cutter
4-Stroke****Work longer, Spend less.**

- Automatic decompression reduces the starter handle force
- Oil pre-filter
- Equipped with damper springs to reduce vibration
- Castors for moving convenience

Wheel diameter	305mm (12")
Engine	75.6mL
Max. cutting depth	97mm (3-13/16")
No load speed (rpm)	4,300
Circumferential speed	80m/s
Engine power	3.0kW / 4.1PS
Fuel tank	1.1L
Bore size	20mm
Dimensions	761x310x435mm
Net weight	12.7kg

Standard Equipment: Engine tool set, Oil, Water supply set.

EK7651H 355mm (14")**High Pressure Washer
4-Stroke****Work longer, Spend less.**

- Automatic decompression reduces the starter handle force
- Oil pre-filter
- Equipped with damper springs to reduce vibration
- Castors for moving convenience

Wheel diameter	355mm (14")
Engine	75.6mL
Max. cutting depth	122mm (4-13/16")
No load speed (rpm)	4,300
Circumferential speed	80m/s
Engine power	3.0kW / 4.1PS
Fuel tank	1.1L
Bore size	25.4mm
Dimensions	780x310x455mm
Net weight	12.9kg

Standard Equipment: Engine tool set, Oil, Water supply set.

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

Generators



EG2250A 2.2kVa**Generator****High Performance by OHV Engine and AVR Alternator**

- Extreme reliability and durability
- Fuel tank realizes continuously longer operation
- No kick-back Starting system (Recoil starter)
- Oil sensor automatically shut off the engine whenever oil level is too low

Fuel tank	15L
Engine model	170F (210mL)
AC output	50Hz : 2.0kVA
Max. AC output VA	50Hz : 2.2kVA
Dimensions	600 x 442 x 450mm
Net weight	49.8kg

Standard Equipment: Accessory tool set.

EG2850A 2.8kVa**Generator****High Performance by OHV Engine and AVR Alternator**

- Extreme reliability and durability
- Fuel tank realizes continuously longer operation
- No kick-back Starting system (Recoil starter)
- Oil sensor automatically shut off the engine whenever oil level is too low

Fuel tank	15L
Engine model	170F (210mL)
AC output	50Hz : 2.6kVA
Max. AC output VA	50Hz : 2.8kVA
Dimensions	600 x 442 x 450mm
Net weight	52.8kg

Standard Equipment: Accessory tool set.

EG4550A 4.5kVa**Generator****High Performance by OHV Engine and AVR Alternator**

- Extreme reliability and durability
- Fuel tank realizes continuously longer operation
- No kick-back Starting system (Recoil starter)
- Oil sensor automatically shut off the engine whenever oil level is too low

Fuel tank	25L
Engine model	190F (420mL)
AC output	50Hz : 4.0kVA
Max. AC output VA	50Hz : 4.5kVA
Dimensions	680 x 550 x 550mm
Net weight	95.5kg

Standard Equipment: Accessory tool set.

EG5550A 5.5kVa**Generator****High Performance by OHV Engine and AVR Alternator**

- Extreme reliability and durability
- Fuel tank realizes continuously longer operation
- No kick-back Starting system (Recoil starter)
- Oil sensor automatically shut off the engine whenever oil level is too low

Fuel tank	25L
Engine model	190F (420mL)
AC output	50Hz : 5.0kVA
Max. AC output VA	50Hz : 5.5kVA
Dimensions	680 x 550 x 550mm
Net weight	98.5kg

Standard Equipment: Accessory tool set.

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V LXT
18V LXT
10.8V/ 12V/MAX CXT
Chain Saws
Hedge Trimmers
Brush Cutters/ String Trimmers
Lawn Mowers
Blowers
Others
Power Cutters
Generators
Accessories

EG6050A 6.0kVa



High Performance by OHV Engine and AVR Alternator.

- Extreme reliability and durability
- Fuel tank realizes continuously longer operation
- No kick-back Starting system (Recoil starter)
- Oil sensor automatically shut off the engine whenever oil level is too low

Fuel tank	25L
Engine model	190F (420mL)
AC output	50Hz : 5.5kVA
Max. AC output VA	50Hz : 6.0kVA
Dimensions	680 x 550 x 550mm
Net weight	100.5kg

Standard Equipment: Accessory tool set.



ACCESSORIES



Guide Bar, Chain Blade, Bar Cover

Guide Bar

Chain Blade


Guide Bar Cover

Cutter Type
SC - Semi Chisel


For Model	Guide Bar			Saw Chain						Bar Cover Part No.	File diameter 1st half of top plate	File diameter 2nd half of top plate
	Bar Length	Bar Type	Guide Bar Part No.	Cutter Type		Gauge	Pitch	Drive Links	Saw Chain Part No.			
EY2650H25H EY401MP	25cm/10"	Sprocket	165695-7	91VXL	SC	1.3mm/ 0.050"	3/8"	39	196142-7	452093-7		
UC120DWA	16cm/6-1/4"	-	158045-3	25AP	SC	1.3mm/ 0.050"	1/4"	42	791284-8	-	4.0mm	4.0mm
EA3502S40B DUC400	40cm/16"	Sprocket	165202-6	90SG	SC	1.1mm/ 0.043"	3/8"	56	511492756	419560-5		
EA4301F45B	45cm/18"	Sprocket	165390-9	91PX	SC	1.3mm	3/8"	62	713080-4	419560-5		
DCS34 DCS4610	30cm/12"	Sprocket	442030661	91VG	SC	1.3mm	3/8"	46	528092646	952100633	4.0mm	4.0mm
	35cm/14"		442035661					52	528092652			
	40cm/16"		-					56	531492656			
DCS430	38cm/15"	Sprocket	-	95VP	SC	1.3mm/ 0.050"	0.325"	64	532484064	-	4.8mm	4.5mm
	45cm/18"		-					72	532484072	952020640		
	40cm/16"	Sprocket	-	-	SC	1.5mm/ 0.58"	0.325"	-	528086666	-		
DCS430 DCS461 DCS460	38cm/15"	Sprocket	443038651	91VG	SC	1.3mm/ 0.050"	3/8"	56	-	952010630	5.5mm	4.8mm
	45cm/18"		443045651					64	523093664	952020640		
DCS461 DCS460	38cm/15"	Sprocket	445038631	21BP	SC	1.5mm/ 0.058"	0.325"	64	528086664	952010630	4.8mm	4.5mm
	45cm/18"		445045631					72	528086672	952020640		
DCS460 DCS5200	38cm/15"	Sprocket	443038651	73LP	FC	1.5mm/ 0.058"	3/8"	56	528099656	952010630	5.5mm	4.8mm
	45cm/18"		443045651	73LP				64	528099664	952020640		
	53cm/21"		443053651	73LP				72	528099672	952020650		
DCS230T DUC252	25cm/10"	Sprocket	168408-5	91VG	SC	1.3mm/ 0.050"	3/8"	40	196205-9	-	4.0mm	4.0mm
DCS6401 DCS7301 DCS7901	38cm/15"	Sprocket	445038655	73LP	FC	1.5mm/ 0.058"	3/8"	60	528099660	-	5.5mm	4.8mm
	50cm/20"		445050655					72	528099672	952100653		
	45cm/18"	Solid	445045455	73LP	FC	1.5mm/ 0.058"	3/8"	68	528099668	-		
	60cm/24"		445060455					84	528099684	952100653		
DCS9010	70cm/28"	Solid	445070455	73LP	FC	1.5mm/ 0.058"	3/8"	94	528099694	952100171	5.5mm	4.8mm
	74cm/30"		445074452					96	528099696	952100171		
	84cm/33"		445084422					27	522103700	952100171		
5012B	30cm/12"	Sprocket	164533-0	91VG	SC	1.3mm/ 0.050"	3/8"	45	196519-6	-	4.0mm	4.0mm
5016B	40cm/16"	Solid	341650-5	91VG	SC	1.3mm/ 0.050"	3/8"	56	196521-9	-	4.0mm	4.0mm
UC4041A	40cm/16"	Sprocket	165247-4	90SG	SC	1.1mm/ 0.043"	3/8"	56	531291656	419242-9	4.5mm	4.0mm
UC4041A	40cm/16"	Sprocket	165202-6	91VG	SC	1.3mm/ 0.050"	3/8"	56	531492656	419242-9	4.0mm	4.0mm
UC4551A	45cm/18"	Sprocket	165390-9	91VG	SC	1.3mm/ 0.050"	3/8"	62	713080-4	419242-9	4.0mm	4.0mm

Guide Bar, Saw Chain, Bar Cover

Rescue Chain

	Type		Size	Part No.
	Rescue cut chain	Chain Blade	45cm	957696064
	Rescue cut chain kit	Chain Blade and Guide bar set	45cm	957415040

Chainsaw Chain Reels

	For model	Cutter type	Gauge	Pitch	Drive links	Part No.
	DCS461, DCS5200, DCS9010, DCS6401, DCS7301, DCS7901	73LP	1.5mm/0.058"	3/8"	1637	957099802
	Packing Box for Chain Reels					959503105

File and Handle

Round File

dia(mm)	Part No.	dia(mm)	Part No.	dia(mm)	Part No.	Chain File	Flat File	Chain Filling Gauge
4.0	953003090	4.5	953003100	4.8	953003070	744003-1	953003060	953100090

File Handle

wooden



Part No.

953004010

File Handle

plastic



Part No.

953008020

File Holder



dia(mm)

3/16"

Part No.

953030030

Screwdrivers

Screwdriver



Size

T27

Part No.

944500860

Angle Screwdriver



Size

T27

Part No.

940827000

Screwdriver



Size

T27 200mm

Part No.

944500862

Chain File



Size

T27 100mm

Part No.

944500861

Flat File



Part No.

944340001

Wrenches

Universal Socket Wrench



Size

SW 13/19mm

Part No.

941719133

Universal Socket Wrench



Size

SW 17/19mm

Part No.

941717192

Universal Socket Wrench



Size

SW 13/16mm

Part No.

941716132

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12V/MAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

Test and Diagnostic Tools


Setting Gauge

For Ignition Armature



Pressure Tester

Pressure / Vacuum




Size	Part No.	Size	Part No.
SW 17/19mm	944500891	SW 13/16mm	957004001

Hedge Trimmer Blade / Shear Blade



Hedge Trimmer Blade



Shear Blade







	For Model	Blade assembly Part No.	Upper Blade Part No.	Lower Blade Part No.	Blade Guard Part No.
	EN420MP	198195-2			
	DUH551	196687-5			
	UH5260	9228MA0210			9101MA0203
	UH5261	140827-7			
	UH4570	194660-9			
	UH6570	194666-7			
	UH7580	194675-6			
	UH4850	222230620	222233220	222233320	
	UH6350	222230641	222233240	222233340	
	UH6540	222230631	223233230	223233330	
	HTR5600		6018505400	6018505500	
	HTR7610		6018505200	6018505301	
	EH760		6018505200	6018505301	
	EH6000W	196797-8			454672-7
	EH7500W	196799-4			454672-7
	EH7500S	196801-3			346731-0
	EN4950H	197763-8			
	DUM604				
	UM600D	198409-9			
	DUM604	195267-4 •			
	UM600D	195176-7			

Edger Blade

	Blade dia	No. of Teeth	Thickness	Model No.	Part No.
	203mm	2T	2.5mm	ER2650H, EE400MP	196745-7

Brush Cutter Nylon Cutting Head

											
	Manual	Bump & Feed								Automatic	
Type		B&F 4R	B&F 4L	B&F 25L	95-M10L	B&F ECO 4R		95-M8R	95-M8R	UltraAuto 4L	SuperAuto XL
Size	5"	4"	4"	5"	4"	4"	3"	4"	4"	4"	4"
Arbor size	M12	M8x1.25RH	M8x1.25LH	M8x1.25LH	M10x1.25LH	M8x1.25RH	M8x1.25RH	M8x1.25RH	M8x1.25RH	M8&10x1.25LH	M8x1.25LH
Part No.	B-02951	A-89137	A-89121	A-89143	197804-0	197297-1	198853-0	198972-2	B-03006	B-02945 (with adapter)	B-01959 •
DUR364L						•					
DUR189								•			
DUR184L						•					
UR100D							•				
BBC300L	•									•	
EM2500U	•		•							•	
RST250	•	•							•		
RBC2500	•		•	•						•	•
EM2650UH	•				•					•	
RBC411	•									•	
EM4350RH	•									•	
EM400MP	•				•					•	
ER400MP		•							•		
Eyelet 2pcs/set for Bump & Feed 4L/4R/Z5L, Ultra Auto 4R/4L/6L Part No. A-15992											
UR3000										DA00000001	

Nylon Cord (String)

Square Shaped Nylon String

For String Trimmers
(For heavy duty application -
cutting thick grass)



Size: 3.0mm Ø x 219m L

369224616

Nylon Cord
For Brush Cutters



1.65mm x 15m

DA00000003

2.4mm x 5m

B-0971

3mm x 4m

B-07375

2.4mm x 1,425m

B-04612



18+18V
LXT

18V
LXT

12VMAX
CXT

Chain Saws

Hedge
Trimmers

Brush
Cutters/
String
Trimmers

Lawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12V/MAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers




Others

Power
Cutters

Generators

Accessories

Brush Cutter Blade

	 Star Blade (4-Tooth Blade) For tall grass and scrub		 Eddy Blade (8-Tooth Blade) For thick grass and scrub		 Saw Blade For bushes and thin tree trunks		 Plastic Blade set	
Blade dia (mm)	230mm	255mm	230mm	255mm	230mm	255mm	255mm	230mm
No. of teeth	4T	4T	8T	8T	80T	24T	M8x1.25RH/LH	M8 x 1.25RH
Thickness	1.8	2.0	1.8		1.8		M10 x 1.25LH	
Part No.	B-14118	B-14124	B-14130	B-01909 •	B-14152	B-01921	198384-9	198848-3
DUR364L							•	
DUR362L	•		•		•			
DUR189							•	
DUR184L								
UR100D								•
BBC300L	•		•		•			
EM2500U	•		•		•			
RST250								
RBC2500	•		•		•			
EM2650UH	•		•		•			
RBC411	•	•	•	•	•	•		
EM4350RH		•						
EM400MP	•		•		•			

Replacement plastic blade: for model DUR364L & DUR189: 198427-7 (12Pcs / Pkg)
UR100D: 198850-6 (5Pcs / Pkg)



Lawn Mower Blade

	Part No.	Size (mm)	Part No.
 	DLM431	430	197761-2
	ELM3310	330	671142202
	ELM3710	370	671014142
	ELM4110	410	671001427
	ELM3311	330	671002550
	ELM3711	370	671002549
	ELM4610, ELM4611, ELM4612, ELM4613	460	671146102
	PLM4110	410	671001433
	PLM4120	410	671001433
	PLM4620N, PLM4621N, PLM4622N	460	671014610
	PLM4620N2, PLM4621N2, PLM4622N2	460	D671001451
	PLM5113N2	510	DA00000973
	PLM5112	510	664004381

Maintenance kit

Maintenance kit comes with spark plug, air filter and fuel filter which are needed for scheduled maintenance to keep the tool in top working condition







For model

EM2650UH/LH, EN4950H, EX2650, EY2650
RBC411
RBC2500, RST250
PM7650/51
EK7651
EB7660TH, EB7660THG, EB7660WH






Part No.

197680-2
197690-9
197688-6
198936-6
199003-0
198437-4

Petrol Blower Accessories

	For Model	Type	Part No.
 	BHX2500	Vacuum set	195282-8 • 197234-5
 	BHX2500	Flat Nozzle Pipe	451753-8
	BHX2500	Pipe	6659500901 • 451752-0

Oil

	Type	Content	Part No.
Chain oil chain oiling is formulated to adhere to the bar and chain and to reduce wear. Adhesion additive helps keep sap and pitch from clinging to the bar and chain. 2 Stroke Oil Makita High-performance two-stroke engine oil is semi-synthetic oil with excellent lubricating qualities, low smoke and low carbon residue. BIOTOP Chain oil With BIOTOP, chain oiling is safe for environment. BIOTOP is purely vegetable-based and readily biodegradable. It meets the strict requirements of the RAL UZ48 environment mark for environmental compatibility, lubrication, and aging resistance	Chain Oil	100ml	182229-1
	2 Stroke Oil	100ml	980008606
		1 Litre	980008607
	BIOTOP Chain Oil (Biodegradable)	1 Litre	980008610
		5 Litre	980008611
	Combination Fuel Can	5L Petrol 2.5L Oil	949000035
	4 Stroke Engine Oil	80ml	1970007-6
	4 Stroke Engine Oil	220ml	195532-1
    			
100ML 1Litre 2 Stroke Oil			
4 Stroke Oil			
BIOTOP Chain Oil (1L / 5L)			
Combination Fuel Can 5L Petrol / 2.5 Litre Oil			

Battery Powered Wheel Barrow Accessories (To be used with DCU180)

Flat Tray	Bucket Tray
Part No. 199009-8 Size width is adjustable. If you remove side pipes, big size materials can be loaded	Part No. 199008-0 Can load sand, gravel, powder etc.
	

18+18V
LXT18V
LXT12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others

Power
Cutters

Generators

Accessories

18+18V
LXT18V
LXT10.8V/
12VMAX
CXT

Chain Saws

Hedge
TrimmersBrush
Cutters/
String
TrimmersLawn
Mowers

Blowers

Others


Power
Cutters

Generators

Accessories

Multi Head Accessories / Attachments -Able to meet a wide range of needs with just one power head
(to be used with models DUX60 & EX2650LH)**Brush Cutter - EM400MP****Part No. 195654-7**

The lower section for nylon cutting head can be removed without tool



Bump & feed 4

Cutting width: 420mm

Dimensions: 876x374x211mm

Net weight: 1Kg

Standard Equipments: Nylon cutting head,
Hex wrench 5.**String Trimmer - ER400MP****Part No. 195528-2**

Bump & feed 4

Dimensions: 703x270x402mm

Net weight: 0.5Kg

Standard Equipments: Nylon cutting head,
Socket wrench 10-16.**Ground Trimmer - EN420MP****Part No. 198060-5**

Suitable for undergrowth mowing that requires special attention for flying stone or kickback



Max cutting capacity: 250mm

Dimensions: 1,324x104x103mm

Net weight: 2.6kg

Standard Equipments: Blade cover Socket wrench.**Cultivator - KR400MP****Part No. 195713-7**

Excellent for cultivating small garden beds and between rows of vegetables or flowers



Cultivating width: 160mm

Outer diameter : 232mm

Dimensions: 965x2354x264mm

Net weight: 2.9Kg

Standard Equipments: Hex wrench 5, Torx Wrench.**Pole Saw - EY401MP****Part No. 196104-5**

Chain oil tank: 0.11L

Guide bar length: 255mm

Dimensions: 1,166x80x120mm

Net weight: 1.1kg

Standard Equipments: Wrench 8-10, Hex wrench 4,
Guide bar cover.**Edger - EE400MP****Part No. 196752-0**

Blade dia: 203mm

Dimensions: 878x131x291mm

Net weight: 2.4Kg

Standard Equipments: Hex wrench 5, Torx Wrench.**Shaft extension attachment - LE400MP****Part No. 196032-4**

For Pole saw & For Pole hedge trimmer



Extension Length: 1,080mm

Dimensions: 1,157x80x80mm

Net weight: 1.3kg

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

